

THE COMMISSIONER FOR PATENTS
Washington, D.C. 20231
Sir:

Case Docket No. P107344-00002
Date July 5, 2000

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the patent application of:
Inventor(s): Shigeru TAMAI; Kouhei KOYAMA; Masatoshi SHINTANI

For: COAT FILM TRANSFER HEAD DEVICE AND COAT FILM TRANSFER TOOL

- ☒ Specification (53 pages)
☒ 24 sheets of drawings
☒ Declaration and Power of Attorney
☒ Return Receipt Postcard
☒ An Assignment of the invention to SEED RUBBER COMPANY LIMITED with PTO-1595
☒ A certified copy of Japanese application(s) No.(s) 11-192409; dated July 6, 1999
☒ A verified statement to establish small entity status under 37 C.F.R. §1.9 and §1.27
☒ A filing fee, calculated as shown below:



	(Col. 1)	(Col. 2)
FOR:	No. Filed	No. Extra
BASIC FEE		
TOTAL CLAIMS	22 - 20 =	* 2
INDEP CLAIMS	3 - 3 =	* 0
<input checked="" type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

Small Entity	
RATE	FEE
	\$345
x 9 =	18
x 39 =	0
+130 =	130
TOTAL	\$493

Other Than A Small Entity	
RATE	FEE
	\$690
x 18 =	
x 78 =	
+260 =	
TOTAL	

If the difference in Col. 1 is less than zero,
enter "0" in Col. 2

- ☒ A check in the amount of \$ 533.00 is enclosed to cover the filing fee and ☒ assignment recordation.
The Commissioner is hereby authorized to charge payment for any additional filing fees associated with
this communication or credit any overpayment to Deposit Account No. 01-2300.

Respectfully submitted,

ARENT FOX KINTNER PLOTKIN & KAHN, PLLC

Arent Fox Kintner Plotkin & Kahn, PLLC
1050 Connecticut Avenue, N.W., Suite 600
Washington, D.C. 20036-5339
Telephone No. (202) 857-6000
Facsimile No. (202) 638-4810
DTN/hk

By: David T. Nikaido
Reg. No. 22,663

Enclosures: Check #296053/Specification and Claims/Declaration/Priority Document (1)
Drawings (24 sheets)/Assignment/PTO-1595 Form/Return Receipt Postcard
Small Entity Declaration

SMALL ENTITY DECLARATION

APPLICANT OR PATENTEE Shigeru Tamai, Kouhei Koyama and Masatoshi Shintani

SERIAL NO. _____ ☐ PATENT NO. _____ ATTORNEY'S DOCKET NO. _____

☐ 1. FILED OR ISSUED _____

☐ 2. SUBMITTED HEREWITH _____

FOR _____
(Insert Title)

I (we) hereby declare that I (we) am (are) entitled to the benefit of small entity status with respect to the above-identified application or patent for purposes of paying reduced fees under 35 U.S.C. §41(a) and (b) to the U.S. Patent and Trademark Office.

☐ A. **INDEPENDENT INVENTOR**

I (we) qualify as (an) independent inventor(s) as defined in 37 C.F.R. §1.9(c).

☐ B. **INDIVIDUAL NON-INVENTOR**

I (we) would qualify as (an) independent inventor(s) as defined in 37 C.F.R. §1.9(c) if I had made the invention.

☐ C. **SMALL BUSINESS CONCERN**

I am ☐ THE OWNER ☐ AN OFFICIAL of the small business concern identified below and am empowered to act on behalf of the concern. The concern qualifies under 37 C.F.R. §1.9(d) and 13 C.F.R. §121.3-18. Rights under contract or law have been conveyed to and remain with the concern and are exclusive unless a checkmark is placed here ☐. All other rights belong to small entities as defined in 37 C.F.R. §1.9.

☐ D. **NON-PROFIT ORGANIZATION**

I am an official empowered to act on behalf of the non-profit organization identified below. The organization qualifies under 37 C.F.R. §1.9(e), subsection: ☐ (1) ☐ (2) ☐ (3) ☐ (4). Rights under contract or law have been conveyed to and remain with the organization and are exclusive unless a checkmark is placed here ☐. All other rights belong to small entities as defined in 37 C.F.R. §1.9.

I (we) acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate [37 C.F.R. §1.28(b)].

I (we) declare under penalty of perjury under the laws of the United States of America that the foregoing is true and correct.

A. INDEPENDENT INVENTORS(S) B. INDIVIDUAL NON-INVENTOR(S)

_____ Name	_____ Signature	_____ Date
_____ Name	_____ Signature	_____ Date
_____ Name	_____ Signature	_____ Date

C. BUSINESS CONCERN D. NON-PROFIT ORGANIZATION

SEED RUBBER COMPANY LIMITED

**3-5-25, Uchindai-cho, Miyakojima-ku,
Osaka-shi, Osaka, Japan**

Name of Concern or Organization

Address

By Takeo Tsuchida
Name of Person Signing

Takeo Tsuchida
Signature

President

June 14, 2000

Title

Date

Coat film transfer head device and coat film transfer tool

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a coat film transfer head device and a coat film transfer tool, and more particularly to a coat film transfer head technique for pressing a coat film transfer tape onto the object of transfer, being disposed at the leading end portion of a coat film transfer tool for transferring correction paint layer, marker paint layer, adhesive layer or other coat film on a coat film transfer tape onto the sheet of paper or the like.

Description of the Related Art

The coat film transfer tool of this kind is disclosed, for example, in Japanese Patent Laid-open Publication No. 5-58097 and Japanese Utility Model Laid-open Publication No. 5-13800.

These coat film transfer tools are both used as an eraser for correcting wrong letters, and as shown in FIG. 24 (a) and FIG. 24 (b), a pay-off reel (c) on which a coat film transfer tape (b) is wound, and a take-up reel (d) for collecting the used coat film transfer tape (b') are rotatably provided in a case (a) which is held by one hand, and a coat film transfer head (f) for pressing the coat film transfer tape (b) onto the object of transfer (the correction area on the sheet of a paper) (e) is projecting from the leading end portion of the case (a).

The both reels (c), (d) are automatically taken up as being linked mutually through an interlock unit (g) so as to cooperate. In the interlock unit (g), gears (h), (i) provided on the outer circumference of the both reels (c), (d) are engaged with each other.

The case (a) is a flat box having the contour shape and width dimension enough for incorporating the pay-off reel (c) and take-up reel (d), and the face and back of the flat shape, that is, the face and back to the sheet of paper in FIG. 24 (a) and FIG. 24 (b) are the gripping sides when held by hand during use.

In the coat film transfer tool in FIG. 24 (a), the leading end pressing portion (j) of the head (f) is designed to guide the coat film transfer tape (b) in a winding state of the pay-off reel (c) and take-up reel (d), and it is a so-called vertical pulling structure suited to correction of a part of vertically written letters such as Japanese sentences. On the other hand, in the coat film transfer tool shown in FIG. 24 (b), the leading end pressing portion (j) of the head (f) is designed to guide the coat film transfer tape (b) almost oppositely to the gripping sides of the case (a), and it is a so-called lateral pulling structure suited to correction of a part of laterally written letters alphabetic sentences.

When correcting wrong letters by these coat film transfer tools, the gripping sides of the case (a) are held by fingers, as shown in the drawing, the coat film transfer tape (b) is held

tightly on the correction area (e) by means of the leading end pressing portion (j) of the head (f), and the case (a) is moved in a desired direction (arrow direction in FIG. 24 (a), vertical direction to sheet of paper in FIG. 24 (b)). As a result, the correction paint layer of the coat film transfer tape at the leading end pressing portion (j) of the head (f) is applied on the correction area (e) and the letter is erased, and the used coat film transfer tape (b') is automatically taken up and collected on the take-up reel (d).

In either structure, however, although it can be used like a writing tool in vertical pulling or lateral pulling use, it is difficult to use in the opposite directly.

Still more, the writing tool is held in different manners depending on the users, and in the structure assuming an ideal and uniform holding manner of writing tool, all users cannot hold like a writing tool.

SUMMARY OF THE INVENTION

It is hence a primary object of the invention to prevent a novel coat film transfer head device solving the problems of the prior art.

It is other object of the invention to present a coat film transfer head device which can be used like a writing tool by adjusting the tape pressing and transferring position depending on the manner of holding a writing tool by the user, concerning the coat film transfer head, and which can check the tape

pressing and transferring position at this time directly and visually.

It is another object of the invention to present a coat film transfer tool having such coat film transfer head device.

The coat film transfer head device of the invention comprises a head main body for pressing and transferring the coat film transfer tape, a head holder for supporting the head main body rotatably about its axial center, and a rotating operation unit for positioning the head main body in the rotating direction, in which the rotating operation unit serves also as a head position indicating unit for indicating the tape pressing and transferring position of the head main body.

In a preferred embodiment, the rotating operation unit includes an operation lever related to the tape pressing and transferring position of the head main body, and this operation lever projects to the outside of the case through an operation guide in a slit form penetrating through the case of the coat film transfer tool. This operation guide in a slit form defines the operating range in the rotating direction of the operation level, and controls the tape pressing and transferring position of the head main body.

A first structure of the coat film transfer tool of the invention is a refill type coat film transfer tool capable of replacing the coat film transfer tape, that is, a tape cartridge containing a rotatable pay-off reel on which a coat film transfer

tape is wound, and a rotatable take-up reel for collecting the used coat film transfer tape is detachably provided in a case which is held by one hand, and the coat film transfer head device is attached to the leading end portion of the tape cartridge.

A second structure of the coat film transfer tool of the invention is a disposable coat film transfer tool having a pay-off reel on which a coat film transfer tape is wound, and a take-up reel for collecting the used coat film transfer tape provided in a case which is held by one hand, and the coat film transfer head device is attached to the leading end portion of the case.

In the coat film transfer head device of the invention, the head main body for pressing and transferring the coat film transfer tape is rotatable about its axial center by the action of the head holder, and it can be used like a writing tool depending on the manner of holding a writing tool of each user.

That is, in the head main body, by manipulating the rotating operation unit, its position in the rotating direction can be selected and set properly in a specified range, and an optimum tape pressing and transferring position is held depending on the application or manner of holding by the user. It also includes a concept that the coat film transfer tool of the invention, if originally designed for use by a right-handed user in the head basic structure, can be held and used by a left-handed user naturally in an optimum head position.

The rotating operation unit also functions as a head position indicating unit for indicating the tape pressing and transferring position of the head main body, so that the user can check the tape pressing and transferring position directly and visually.

These and other objects and features of the invention will be more clearly understood by reading the detailed description with the accompanying drawings and the novel facts indicated in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view showing an eraser in embodiment 1 of the invention.

FIG. 2 is a side sectional view showing principal parts of the eraser.

FIG. 3 is a perspective view of an open case state of the eraser.

FIG. 4 is a front view showing the inside of the cases main body of the eraser.

FIG. 5 is a perspective exploded view of the eraser.

FIG. 6 is a perspective exploded view of a tape cartridge of the eraser.

FIG. 7 is a magnified side view of a partial section of rotary structure of a coat film transfer head of the eraser.

FIG. 8 is a partial sectional side view for explaining the operation in rotating direction of the coat film transfer head

of the eraser.

FIG. 9 is a front sectional view showing the pay-off reel side position of the tape cartridge of the eraser.

FIG. 10 is a perspective exploded view of the pay-off reel side position.

FIG. 11 is a front sectional view for explaining the assembling procedure of the pay-off reel side position.

FIG. 12 is a perspective view showing the lateral pulling use state by right hand of the eraser.

FIG. 13 is a perspective view showing the vertical pulling use state by right hand of the eraser.

FIG. 14 is a perspective view showing the lateral pushing use state by right hand of the eraser.

FIG. 15 is a perspective view showing the lateral pulling use state by left hand of the eraser.

FIG. 16 is a perspective view showing the structure of a coat film transfer head of an eraser in embodiment 2 of the invention.

FIG. 17 is a perspective view showing the structure of a coat film transfer head of an eraser in embodiment 3 of the invention.

FIG. 18 is a perspective view showing the structure of a coat film transfer head of an eraser in embodiment 4 of the invention.

FIG. 19 (a) is a perspective view showing a bearing of the

coat film transfer head.

FIG. 19 (b) is a side view of the coat film transfer head.

FIG. 20 is a perspective view showing the structure of a coat film transfer head of an eraser in embodiment 5 of the invention.

FIG. 21 is a partial sectional side view showing the structure of a coat film transfer head of an eraser in embodiment 6 of the invention.

FIG. 22 is a perspective exploded view of an eraser in embodiment 7 of the invention.

FIG. 23 is a perspective exploded view of a tape cartridge of the eraser.

FIG. 24 (a) is a partially cut-away front view of internal structure of a conventional eraser in vertical pulling use structure.

FIG. 24 (b) is a partially cut-away front view of internal structure of a conventional eraser in lateral pulling use structure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, preferred embodiments of the invention are described below.

FIG. 1 through FIG. 23 show the tape cartridge and coat film transfer tool of the invention, and same reference numerals given throughout the drawings indicate same structural members or elements.

Embodiment 1

A coat film transfer tool according to an embodiment of the invention is shown in FIG. 1 to FIG. 15. This coat film transfer tool 1 is specifically used as an eraser for correcting wrong letters, particularly relating to the cartridge type or refill type structure capable of replacing a coat film transfer tape T which is a consumable part.

The coat film transfer tool 1 includes a case 2 having an appearance and shape as shown in FIG. 1, in which, as shown in FIG. 3 and FIG. 4, a tape cartridge C having a coat film transfer head H and a tape interlock unit (interlock mechanism) D are disposed, and moreover a pay-off reel 3 and a take-up reel 4 are supported on the tape cartridge C. Each component is described below.

I. Case 2

The case 2 is, as shown in the drawing, a flat box having a front contour shape and width dimension enough to incorporate the tape interlock unit D, and, as mentioned below, its confronting pair of flat face and back surfaces 2a, 2b are standard gripping sides when held in hand during use.

The case 2 is a plastic structure molded integrally by injection molding or the like, consisting of a case main body 5 and a cap body 6 which can be separated from each other, and the tape cartridge C and tape interlock unit (interlock mechanism) D are mounted on the case main body 5.

The case main body 5 and cap body 6 are composed as shown in FIG. 3 and FIG. 5, in which an opening inner peripheral edge 6a of the cap body 6 is fitted to a fitting flange 5a provided on almost entire circumference of the opening inner peripheral edge of the case main body 5. At one side of the case main body 5 and opening of the cap body 6, separable engaging portions 7a, 7b are provided, and engaging portions 9a, 9b tightened together by a tightening cap 8 are provided at the opposite side.

At the leading end portions of the case main body 5 and cap body 6, inserting grooves 10a, 10b for forming head insertion parts 10 for inserting the coat film transfer head H inside out are formed by notching, and at the inside of the case main body 5, moreover, hollow rotary support shafts 11, 12 are integrally provided for rotating and supporting the pay-off reel 3 and take-up reel 4 of the tape cartridge C.

By assembling the cap body 6 into the case main body 5 by mutually positioning and fixing, the opening inner peripheral edge 6a of the cap body 6 is fitted into the fitting flange 5a of the case main body 5, and the engaging portions 7a, 7b and the engaging portions 9a, 9b are engaged with each other. By sliding the tightening cap 8 to cover the engaging portions 9a, 9b, the both 9a, 9b are tightened to each other, and the case 2 is closed.

On the other hand, by the reverse manipulation, the case 2 is separated from the case main body 5 and cap body 6, and

is opened. In this closing process of the case 2, the circular head insertion part 10 is opened and formed at the leading end portion, and through this head insertion part 10, the coat film transfer head H projects outside from the leading end portion of the case 2 and is positioned.

In the cap body 6, moreover, a remainder check window 13 for checking the remainder of the coat film transfer tape T and an opening 14 for a rewind button 101 mentioned below are continuously opened.

II. Tape cartridge C

The tape cartridge C is a replaceable part as a consumable part, and its specific structure is shown in FIG. 2 to FIG. 11.

The tape cartridge C has a support main body 15, on which a pay-off reel 3 winding a coat film transfer tape T and a rotatable take-up reel 4 for collecting the used coat film transfer tape T' are rotatably mounted, and a coat film transfer head H for pressing the coat film transfer tape T onto the object of transfer is mounted rotatably about the axial center of the head. The tape cartridge C is mounted detachably on the case main body 5 as shown in FIG. 2 to FIG. 5.

The support main body 15 is, specifically, a synthetic resin structure formed as a cartridge case for accommodating the both reels 3, 4, and comprises a support base plate 20, a protective wall 21, and a protective plate 22. The support base plate 20 and protective wall 21 are formed in one body by injection

molding or the like, and compose the principal parts of the support main body 15.

The support base plate 20 rotatably supports the both reels 3, 4, and its shape and dimension are set as thin and compact as possible within a range of assuring the holding function of the reels 3, 4.

Specifically, the support base plate 20 has a flat plate skeletal structure having an outer contour corresponding to the inner contour of the case 2.

The skeletal structure of the support base plate 20 comprises an outer contour skeletal member 20a for forming the outer contour of the support base plate 20, a pair of bearing skeletal members 20b, 20b for forming bearings 25, 26 for rotating and supporting the both reels 3, 4, and a plurality of connection skeletal members 20c, 20c, ... for connecting the outer contour skeletal member 20a and bearing skeletal members 20b , 20b, which are connected together to form a flat plate skeleton.

The outer contour skeletal member 20a has an outer contour corresponding to the inner contour of the case 2 as mentioned above, and composes a connection part with the protective wall 21 mentioned below. The bearing skeletal members 20b, 20b form, as shown in the drawing, bearings 25, 26 in a flat arc shape opened in part. The connection skeletal members 20c are formed as being extended in the radial direction about the pair of

bearings 25, 26.

By such skeletal layout structure, while maintaining the specified holding strength, a lightweight compact structure is realized by using materials as little as possible. In particular, by disposing the connection skeletal members 20c, 20c, ... radially, a uniform strength is assured in the entire support base plate 20, and a lightweight compact structure is realized.

The both bearings 25, 26 designed to support rotatably the upper side ends of rotary shafts 31, 32 of the both reels 3 and 4, that is, the ends 31a, 32a at the opposite side of the side of the case main body 5 supported by the rotary support shafts 11, 12.

In a specific rotary support structure of the both reels 3, 4 in the bearings 25, 26, engaging portions 35, 36 are provided in the upper side ends 31a, 32a of the rotary shafts 31, 32 of the reels 3, 4, and these engaging portions 35, 36 are rotatably engaged with the inner support portions of the bearings 25, 26.

In the illustrated embodiment, the bearings 25, 26 are in a form of bearings having outward openings opposite to each other as shown in FIG. 6. The flat shape of the bearings 25, 26 is designed in consideration of ease of assembling at the manufacturing site.

That is, the bearings 25, 26 are composed of circular parts 25a, 26a having an inner diameter corresponding to the outer

diameter of the engaging portions 35, 36, and mounting insertion parts 25b, 26b spreading in a taper outward from the circular parts 25a, 26a.

The circular parts 25a, 26a of the bearings 21, 22 are disposed corresponding to the rotary support shafts 11, 12 of the case main body 5, respectively. Accordingly, in the configuration of the both reels 3, 4 on the support base plate 20, as shown in FIG. 4 and FIG. 5, the rotary shafts 31, 32 are set so as to be positioned coaxially to the rotary support shafts 11, 12, respectively.

On the other hand, the engaging portion 35 of the rotary shaft 31 of the pay-off reel 3 is an annular engaging groove formed in the entire circumference, and the engaging portion 36 of the rotary shaft 32 of the take-up reel 4 consists of a plurality of (three in this case) engaging pawls 36a, 36a, 36a formed at equal intervals in the circumferential direction.

As the engaging portions 35, 36 of the rotary shafts 31, 32 of the both reels 3, 4 are pressed and inserted by force from the mounting insertion parts 25b, 26b into the circular parts 25a, 26a, the boundary parts of the mounting insertion parts 25b, 26b and the circular parts 25a, 26a are expanded elastically, and are returned elastically, and the engaging portions 35, 36 are rotatably and slidably engaged and supported with the circular parts 25a, 26a, so that the both reels 3, 4 are positioned and supported at specified positions.

The protective wall 21 formed integrally with the support base plate 20 is provided in a standing form (that is, downward drooping form) from the outer peripheral edge of the support base plate 20, that is, the outer contour skeletal member 20a, and cooperates with the support base plate 20 to form the cartridge case for surrounding and accommodating the lower side of the both reels 3, 4, that is, three sides except the mounting side to the case main body 5.

This protective wall 21 is curved and formed so as to surround the outer circumference of the both reels 3, 4 along the outer contour shape of the support base plate 20, and surrounds and protects the outer circumference of the both reels 3, 4, and also reinforces the strength of the support base plate 20. Therefore, when assembling, handling and using the tape cartridge C, unexpected dislocation of the coat film transfer tape T from the pay-off reel 3 is prevented, and when handling the tape cartridge C, the coat film of the outermost surface of the coat film transfer tape T is covered and protected.

Hence, the relative shape and dimensions of the protective wall 21 and the reels 3, 4 are set so as to achieve this object and to prevent effectively dislocation of the both reels 3, 4 from the bearings 25, 26.

The protective wall 21 also functions as the positioning means for determining the support main body 15 on the case main body 5. For this purpose, the outer circumference 21a of the

protective wall 21 has engaging portions 38, 38, ... to be engaged with positioning engaging portions 37, 37, ... provided in the inner circumference of the case 2. The engaging relation of these positioning engaging portion 37 and engaging portions 38 is determined in a structure detachable in the vertical direction and positioned in the lateral direction, that is, the horizontal direction.

In the state of the tape cartridge C being installed in the case main body 5, by positioning and engaging of the engaging portions 37, 38, 37, 38, ..., the both reels 3, 4 are rotatably supported at both sides by the rotary support shafts 11, 12 of the main body case 5 and the support base plate 20 through the protective wall 21.

The protective plate 22 covers and protects the opposite side of the take-up reel 4 rotatably supported on the support base plate 20, and is provided at the open side edge of the protective wall 21. This protective plate 22 has a flat plate skeletal structure parallel to the support base plate 20, and its specific structure is designed to realize a lightweight compact structure by using materials as little as possible, while maintaining the specified strength, same as the support base plate 20.

That is, the protective plate 22 comprises, as shown in FIG. 6, an outer contour skeletal member 22a having a flat arc shape corresponding to the protective wall 21, an inner contour

skeletal member 22b having the diameter corresponding to the lower side of the take-up reel 4, and radial connection skeletal members 22c, 22c, ... for connecting the both 22a, 22b, which are connected in a skeletal structure.

At the inner side of the inner contour skeletal member 22b of the protective plate 22, that is, at the upper side, supports 39, 39, ... for slidably and rotatably supporting the lower side of the take-up reel 4 are provided in an annular form. By contrast, although not shown, at the lower side of the take-up reel 4, supports 39, 39, ... are provided concentrically about the annular grooves to be engaged slidably and rotatably.

The pay-off reel 3 has a hollow cylindrical tape core 40 winding a new coat film transfer tape T, and also includes a clutch mechanism 50 interlocked with the tape core 40 and a pay-off rotary gear 45 of the tape interlock unit D. The specific mounting structure of the pay-off reel 3 is described later in relation to a clutch mechanism 50.

The take-up reel 4 is to take up and collect the used coat film transfer tape T', and the leading end portion of the coat film transfer tape T is connected to the outer circumference of the hollow cylindrical tape core 41.

The tape core 41 serves also as part of the rotary shaft 32 of the take-up reel 4, and its axial upper end is integrally formed coaxially with the upper end 32a mentioned above, and this upper end 32a is rotatably supported on the support base

plate 20. On the other hand, in the center of the tape core 41 (32), there is a fitting hole 41a having a tooth profile engaging portion of serration or spline, and it is integrally engaged with a rotary shaft 46a of a take-up rotary gear 46 of the tape interlock unit D mentioned below, detachably and integrally in the rotating direction.

The coat film transfer tape T is, for example, a plastic tape of polyester or acetate, or film base material of paper tape or the like (about 25 to 38 μ m in thickness), having one side coated with a parting layer of vinyl chloride-vinyl acetate copolymer resin, low molecular polyethylene or the like, with an overlaying white correction paint layer, and further with a pressure-adhesive polyurethane or other adhesive agent (pressure-sensitive adhesive) in a laminate structure (specific structure not shown). The correction paint layer is of so-called dry type allowing to write on immediately after transfer.

The coat film transfer head H is to press the coat film transfer tape T onto the correction area (transfer area) such as wrong letters on the sheet of paper, and has a function of guiding the coat film transfer tape T and a function of pressing. The coat film transfer head H is provided on the support main body 15, and its base end support unit is held on the support main body 15 rotatably about the head axial center. More specifically, the coat film transfer head H has a head main body

60, a head holder 61, and a rotating operation unit 62.

The head main body 60 is to press and transfer the coat film transfer tape T, and specifically it is a rectangular plate having a certain elasticity, and a supported portion 65 is integrally formed at the base end side position.

The head main body 60 in the illustrated embodiment is a thin plate slightly wider than the coat film transfer tape T, and has a taper section so as to be thinner gradually toward the leading end, and its flat both sides form the tape running sides, and the leading end 63 is the leading end pressing portion for pressing the coat film transfer tape T. At both side edges of the head main body 60, there are guide flanges 64, 64 for guiding the running motion of the coat film transfer tape T.

The head holder 61 is to support the head main body 60 rotatably about its axial center, and comprises the supported portion 65 and a bearing 66 provided in the support main body 15 at the device main body side.

The supported portion 65 is a cylindrical piece provided concentrically and integrally with the head main body 60 as shown in FIG. 6 to FIG. 8, and more specifically a part thereof is formed in a section arc form having a setting opening 65a of the coat film transfer tape T to the head main body 60.

The bearing 66 is integrally provided at the leading end of the support main body 15 on the outer circumference of the protective wall 21 through the support unit 67. This bearing

66 is a tubular structure having an inner circumference corresponding to the outer circumference of the supported portion 65 as shown in FIG. 6 to FIG. 8, and, same as the supported portion 65, a part thereof is formed in a section arc form having a setting opening 66a of the coat film transfer tape T to the head main body 60. The supported portion 65 is slidably and rotatably supported on the bearing 66, and the head main body 60 is freely rotatably about the axial center, in a specified rotating angle range mentioned below.

The rotating operation unit 62 is to operate in order to determine the position of the head main body 60 in the rotating direction, and functions also as the head position indicating part for indicating the tape pressing and transferring position of the head main body 60.

The rotating operation unit 62 is a columnar bar, and has an operation lever 70 having an operation knob 70a at its leading end as a principal part. This operation lever 70 is integrally formed near the leading end of the supported portion 65, and is extended linearly outward in the radial direction from the axial center of the supported portion 65. Relating to this, at the axial direction corresponding position of the bearing 66, a slit-form insertion part 71 is provided, and similarly at the corresponding position of the case 2, a slit-form operation guide 72 is opened.

The operation lever 70 projects to outside of the case 2,

through the insertion part 71 and operation guide 72. In this case, the insertion part 71 of the bearing 66 functions as locking piece for preventing the head main body 60 from slipping out in the axial direction.

The rotating direction disposing position of the operation lever 70 corresponding to the head main body 15 is set in relation to the tape pressing and transferring position of the head main body 15, and the inserting part 71 and operation guide 72 are extended in the peripheral direction so as to allow move of the operation lever 70 in the rotating direction of the head main body 15. In particular, the operation guide 72 of the case 2 defines the rotating direction operating range of the operation lever 70, and controls the tape pressing and transferring position of the head main body 60.

The relation between the operation lever 70 and the tape pressing and transferring position of the head main body 15 is explained below in relation to the operation guide 72 (see FIG. 7, FIG. 8, FIG. 12 to FIG. 15).

The composition of the operation guide 72 as the rotating direction operation range defining unit is determined as follows by reference to FIG. 7.

(a) When the operation lever 70 is in a state engaged with one end 72a of the operation guide 72, that is, at a vertical downward position (first defining position A shown in FIG. 8 (a)), the head main body 60 of the coat film transfer head H

is at an angle position for guiding, with the leading end pressing part 63 setting the coat film transfer tape T almost opposite to the gripping sides 2a, 2b of the case 2, so that the face and back surfaces of the coat film transfer tape T may be almost in the same direction as (parallel to) the gripping sides 2a, 2b.

In this case, the new coat film transfer tape T forwarded from the pay-off reel 3 is at the lower side of the head main body 60, and it is in a state for lateral pulling use suited to a right-handed user for correcting a part of, for example, alphabetic writing (see FIG. 12).

(b) When the operation lever 70 is at an intermediate position between the both ends 72a, 72b of the operation guide 72, that is, at a horizontal position (second defining position B shown in FIG. 8 (b)), the head main body 60 of the coat film transfer head H is at an angle position for guiding, with the leading end pressing part 63 setting the coat film transfer tape T remaining at the winding position of the pay-off reel 3 and take-up reel 4, so that the face and back surfaces of the coat film transfer tape T may be almost in the vertical direction to (orthogonal to) the gripping sides 2a, 2b.

In this case, the new coat film transfer tape T forwarded from the pay-off reel 3 is at left lower side of the head main body 60, and it is in a state for vertical pulling use suited for correcting a part of, for example, Japanese writing (see

FIG. 13).

(c) When the operation lever 70 is engaged with other end 72b of the operation guide 72, that is, at a vertical upward position (third defining position C shown in FIG. 8 (c)), the head main body 60 of the coat film transfer head H is at an angle position for guiding, with the leading end pressing part 63 setting the coat film transfer tape T almost oppositely to the gripping sides 2a, 2b of the case 2 in a state upside down of the case (a) above.

In this case, the new coat film transfer tape T forwarded from the pay-off reel 3 is at upper side of the head main body 60, and it is in a state for lateral pushing use suited to a right-handed user for correcting a part of, for example, alphabetic writing (see FIG. 14), or in a state for lateral pulling use suited to a left-handed user for correcting a part of, for example, alphabetic writing (see FIG. 15).

The rotating operation unit 62 is for positioning the head main body 60 in the rotating direction, and it also functions as head position indicating unit for indicating the tape pressing and transferring position of the head main body 60.

As clear from the description herein, the direction of the operation lever 70 indicates directly and visually the opposite direction of the new coat film transfer tape T (functioning as head position indicating unit), and the user can check the tape pressing and transferring position of the head main body 60 by

referring to the direction of this operation lever 70.

The rotating direction operating range of the operation guide 72 (almost 180° at maximum in the shown example) can be set in various values from a small angle range to a large angle range, in consideration of the relation with the operation lever 70 and tape pressing and transferring position of the head main body 15.

The coat film transfer tape T forwarded from the pay-off reel 3 is guided into the leading pressing portion 63 along the one-side tape running surface of the coat film transfer head H, and is inverted through the leading end pressing portion 63, and is further guided along the opposite-side tape running surface to be taken up on the take-up reel 4.

In this case, as mentioned above, the leading head pressing portion 63 of the coat film transfer head H cooperates with the tape running surface of the head side, and guides the coat film transfer tape T in various running positions as mentioned above.

Concerning the configuration of the coat film transfer head H and both reels 3, 4, a pair of guide pins 80, 81 are provided between the both reels 3, 4 of the support main body 15 and the coat film transfer head H, and these guide pins 80, 81 function as the tape position changing means for changing the running position of the coat film transfer tape T.

One guide pin 80 is for changing the position of the coat film transfer tape T forward from the pay-off reel 3 to guide

into the coat film transfer head H, and is formed in an upright position integrally at a proper position of the support main body 15 between the pay-off reel 3 and the coat film transfer head H. Other guide pin 81 is for changing the position of the used coat film transfer tape T' from the coat film transfer head H to guide into the take-up reel 4, and it is formed in an upright position integrally at a proper position between the coat film transfer head H and take-up reel 4.

In such structure having the both guide pins 80, 81 provided in the support main body 15, setting of the tape T is all complete in the product stage, and a general use has only to replace the tape cartridge C.

Further, on the take-up side guide pin 81, a guide roller (not shown) is rotatably supported. In such structure, smooth and neat take-up guide of the coat film transfer tape T' is promoted, and if a part of the coat film is left over due to transfer failure on the coat film transfer tape T', the inconvenience of the coat film transfer tape T' being wound around the guide pin 81 can be securely prevented. A similar guide roller may be also provided in the pay-off side guide pin 80.

III. Tape interlock unit D

The tape interlock unit (interlock mechanism) D is for mutually interlocking the pay-off reel 3 and take-up reel 4, and more specifically it is composed of a pay-off rotary gear

(interlock gear) 45 provided at the pay-off reel 3 side, and a take-up rotary gear (interlock gear) 46 provided at the take-up reel 4 side.

The pay-off rotary gear 45 is formed integrally with a rotary drive unit 91 of the clutch mechanism 50 provided in the pay-off reel 3, and the rotary drive unit 91 functions also as rotary shaft of the pay-off rotary gear 45. The rotary drive unit 91 is a hollow cylinder, and is supported detachably and rotatably on the rotary support shaft 11 of the case main body 5. In this case, the axial lower end of the rotary drive unit 91 is slidably supported on the inner side of the case main body 5 as shown in FIG. 2. Reference numeral 92 is an annular rib provided at the inner side of the case main body 5, and this annular rib 92 is disposed corresponding to the outer circumference of the pay-off rotary gear 45 concentrically with the rotary support shaft 11, and slidably supports the lower side of the pay-off rotary gear 45, thereby preventing excessive distortion of the pay-off rotary gear 45.

On the outer circumference of the rotary shaft 91, the tape core 40 of the pay-off reel 3 is supported coaxially and rotatably, and the tape core 40 and pay-off rotary gear 45 are frictionally engaged with each other through engaging protrusions 100, 100, ... which are frictional engaging members of the clutch mechanism 50 described later.

The take-up rotary gear 46 is rotatably supported on the

rotary support shaft 12 of the case main body 5 for supporting the take-up reel 4, and is engaged with the pay-off rotary gear 45 formed in a unit together with the pay-off reel 3 in the support main body 15. At the leading end of the rotary support shaft 12, a locking piece 12a is provided for preventing the take-up rotary gear 46 from slipping out.

Further, at the inner side of the case main body 5, an annular rib 93 is provided concentrically to the rotary support shaft 12 and corresponding to the take-up rotary gear 46, and the take-up rotary gear 46 is slidably and rotatably supported on this annular rib 93.

The take-up rotary gear 46 is engaged with the pay-off rotary gear 45 at a specific gear ratio, so that the take-up rotary gear 46 rotates in cooperation with the pay-off rotary gear 45 always at a specific rotation ratio. The rotation ratio, that is, the gear ratio of the both gears 45, 46 is set properly so that the coat film transfer tape T may be paid off and taken up properly in consideration of the winding diameter of the coat film transfer tape T on the pay-off reel 3 and take-up reel 4 as mentioned later.

In this relation, as shown in FIG. 3 to FIG. 6, the support main body 15 and the tape core 41 of the take-up reel 4 are provided with reverse rotation preventive mechanism 95 for preventing reverse rotation of the both reels 3, 4. The reverse rotation preventive mechanism 95 comprises, as shown in FIG.

4 and FIG. 6, a detent pawl 95a provided elastically deformably in the support base plate 20 of the support main body 15, and multiple reverse rotation preventive pawls 95b, 95b, ... provided concentrically and annularly with the rotary shaft 32 on the outer side of the flange 41b of the tape core 41.

Accordingly, when the both reels 3, 4 are moved to rotate in the arrow direction, the detent pawl 95a rides over the reverse rotation preventive pawls 95b, 95b, ... while deforming elastically, and allows the normal rotation. On the other hand, when the both reels 3, 4 are moved to rotate in the opposite direction of the arrow direction, the detent pawl 95a is engaged with any one of the reverse rotation preventive pawls 95b, 95b, ..., and arrests the reverse rotation.

Moreover, by forming one more detent pawl 95a at a confronting position to the detent pawl 95a on the diameter line of the annular circle of disposing the reverse rotation preventive pawls 95b, 95b, ... (see virtual line in FIG. 4), reverse rotation preventive action of better balance is achieved. The reverse rotation preventive mechanism 95 may be disposed, aside from the illustrated configuration, also between the case main body 5 and the take-up rotary gear 46 or pay-off rotary gear 45.

IV. Clutch mechanism 50

The clutch mechanism 50 of the embodiment is formed into a unit in the tape cartridge C together with the pay-off reel

3 and the pay-off rotary gear 45 of the tape interlock unit D, and is a replaceable consumable part, like the coat film transfer tape T. For this purpose, the specific structure of the clutch mechanism 50 is simple and inexpensive as explained below.

A specific structure of the clutch mechanism 50 is shown in FIG. 9 to FIG. 11, and is mainly composed of plural engaging protrusions 100, 100, ... integrally formed in the pay-off rotary gear 45, and an engaging support member 101.

The engaging protrusions 100 function as frictional engaging members for composing the power transmitting means in the clutch mechanism 50, and are formed integrally as being extended inside the radial direction at plural positions (four positions in the drawing) in the circumferential direction of the pay-off rotary gear 45. The engaging protrusion 100 is elastically deformable in the axial direction from the base part at its outer circumferential side, and has an engaging portion 100a bulged upward at the leading end portion at its inner circumferential side. In the illustrated embodiment, the leading end portion at the inner circumferential side of the engaging protrusion 100 is integrally connected and supported to the rotary drive unit 91 by means of a thin-wall connection piece 102 for reinforcement.

The engaging portion 100a of the engaging protrusion 100 projects upward from the upper surface of the pay-off rotary gear 45 in ordinary state at a position opposite to the axial

end 40a of the tape core 40, and has an engaging plane corresponding to the plane of the axial end 40a.

The engaging support member 101 is specifically a rewind button, and functions also as a constituent member of tape rewinding mechanism for eliminating the slack of coat film transfer tape T between the both reels 3, 4.

This rewind button 101 has an axial engaging portion 105 engaged with the axial end 40b of the tape core 40, and a detent pawl 106 engaged with the rotary drive unit 91.

The axial engaging portion 105 is an engaging bump projecting horizontally in the radial direction from the outer circumference of the rewind button 101, and functions also as a rotation engaging portion of the tape rewind mechanism, and five portions are provided at equal intervals in the circumferential direction in the illustrated example. In correspondence therewith, at the axial end 40b of the tape core 40, five engaging recesses 107 to be engaged with the axial engaging portions 105 are provided at equal intervals in the circumferential direction.

The detent pawl 106 is a vertical slit formed in a part of the mounting cylindrical portion 101a of the rewind button 101, and its leading end engaging portion is elastically deformable in the radial direction. In the illustrated example, a pair of detent pawls 106, 106 are provided oppositely on one diameter line of the mounting cylindrical portion 101a, and the leading

end engaging portion of the detent pawl 106 is formed like a downward wedge.

In correspondence therewith, on the inner circumference of the rotary drive unit 91, there is an engaging flange 108 to be engaged with the detent pawl 106 in the axial direction. The inner diameter of the engaging flange 108 is set in a size enough to allow to insert the mounting cylindrical portion 101a of the rewind button 101, and fix by preventing the engaging leading end portion of the detent pawl 106 from slipping out.

Therefore, after inserting the tape core 40 of the pay-off reel 3 into the rotary drive unit 91, the rewind button 101 is inserted into the rotary drive unit 91 of the pay-off rotary gear 45 so that the axial engaging portions 105, 105 may correspond to the engaging recesses 107, 107, ... of the tape core 40. As a result, the detent pawls 106, 106 of the rewind button 101 are elastically deformed inside in the radial direction on the engaging flange 108 of the rotary drive unit 91, and pass in the axial direction, and, by elastic restoration, are engaged with the engaging flange 108 to prevent from slipping out (see FIG. 11 (a) to FIG. 11 (b)).

Accordingly, the tape core 40 is held and supported from both sides in the axial direction by means of the engaging protrusions 100, 100, ... of the pay-off rotary gear 45 and the axial engaging portions 105, 105, ... of the rewind button 101, and at the same time, by the axial engaging force of the rotary

drive unit 91 and rewind button 101, the engaging protrusions 100, 100, ... of the pay-off rotary gear 45 are frictionally engaged with the axial end 40a of the tape core 40 elastically in the rotating direction with a specified pressing force.

That is, in power transmission of the clutch mechanism 50, the frictional engaging force by the thrust load acting between the axial end 40a of the tape core 40 and engaging protrusions 100, 100, ... of the pay-off rotary gear 45 is utilized, and this frictional engaging force is set to an optimum value by properly adjusting the engaging dimensional relation of the rotary drive unit 91 and the rewind button 101 in the axial direction.

More specifically, in consideration of the spring constant and elastic deformation amount of the engaging protrusions 100, 100, ... of the pay-off rotary gear 45, the relative axial positional relation between the tape core 40 and pay-off rotary gear 45 by the axial engaging portion 105 of the rewind button 101 and the detent pawl 106 is properly adjusted, and the frictional engaging force of the engaging protrusions 100, 100, ... and the axial end 40a of the tape core 40 is set to an optimum value.

When assembling the tape cartridge C, first, the composed units of pay-off reel 3, pay-off rotary gear 45, and rewind button 101 (see FIG. 10) are integrally assembled in the axial direction as shown in FIG. 9 and FIG. 11. In succession, the

unit assemblies 3, 45, and 101, and the take-up reel 4 are mounted on the bearings 25, 26 of the support main body 20 in the procedure described above. Finally, the coat film transfer tape T forwarded from the pay-off reel 3 is set along the periphery of the coat film transfer head H as mentioned above, and the its leading end portion is connected to the take-up reel 4 so as to be wound up, and the tape cartridge C is completed.

The rewind button 101 is, as shown in FIG. 1, set opposite to the outside of the case 2 by way of the opening 14 formed in the case body 6 of the case 2, and is set flush with or lower than the surface or the gripping side 2a of the case 2 (see Fig. 2). At the outer end of the rewind button 101, that is, the outer surface 101b, a linear operation groove 101c is formed as a rotation operating unit for rewind rotating operation, and a coin or a plate operating member is detachably engaged with this operation groove 101c.

Referring now to Fig. 2 to Fig. 5, thus composed tape cartridge C is held by fingers, the pay-off rotary gear 45 is being engaged with the take-up rotary gear 46 mounted on the rotary support shaft 12 of the case main body 5, and the rotary shaft 91 of the pay-off rotary gear 45 and the tape core 41 of the take-up reel 4 are respectively engaged with the rotary support shaft 11 of the case main body 5 and the rotary shaft 46a of the take-up rotary gear 46 from upper side, and at the same time the coat film transfer head H is positioned and

inserted into the insertion groove 10a which is the head holder of the case main body 5, so as to be set instantly.

At this time, the positioning engaging portions 38, 38, ... of the support main body 15 are simultaneously engaged respectively with the positioning engaging portions 37, 37, ... of the case main body 5. In the positioned state of the support main body 15, the support main body 15 cooperates with the rotary support shafts 11, 12, thereby rotating and supporting the pay-off reel 3 and take-up reel 4 at both sides.

On the other hand, by picking the support main body 15 by fingers and directly lifting to the upper side, the pay-off rotary gear 45, tape core 41, and coat film transfer head H can be detached easily and instantly from the rotary support shaft 11, rotary shaft 46a of the take-up rotary gear 46, and insertion groove 10a, respectively.

In this way, with the tape cartridge C being installed in the case main body 5, when the cap body 6 is put on the case main body 5 to prevent from moving and lock in the procedure mentioned above, the coat film transfer tool 1 is completed. In this case, the rewind button 101 is opposite to outside through the opening 14 of the cap body 6, and the coat film transfer head H projects outside through the head insertion part 10.

In this case, the coat film transfer head H can rotate about the head axial center in a rotating angle range of the operation

lever 70 of the rotary operation unit 62 defined by the operation guide 72, and the coat film transfer head H can be held in an optimum state according to the purpose or the user's manner of holding.

That is, when correcting wrong letters by thus constituted coat film transfer tool 1, whether the user is right-handed or left-handed, as mentioned above, the operation lever 70 can be rotated and manipulated according to the purpose, and an optimum tape pressing and transferring position of the head main body 60 of the coat film transfer head H can be selected and set (for example, first defining position A shown in Fig. 8 (a), second defining position B shown in Fig. 8 (b), and third defining position C shown in Fig. 8 (c)), and the gripping sides of the case 2 corresponding to the position are held by fingers (the standard gripping sides are face and back surfaces 2a, 2b of the case 2, and other sides of the case 2 may be also held depending on the purpose), so that various manners of use are realized as shown in Fig. 12 to Fig. 15.

In any manner of use, the gripping sides of the case 2 are held by fingers in the same manner as when holding a writing tool, and the leading end pressing portion 63 of the coat film transfer head H is pressed tightly to the start end of the correction area (transfer area) 110 on the sheet of paper to correct wrong letters, and the case 2 is moved directly along the sheet of paper, and stopped at the end (right end) of the

correction area 110.

By this manipulation, the correction paint layer (white) 111 of the coat film transfer tape T in the pressing portion 63 of the coat film transfer head H is peeled off from the film base material, and is transferred and applied on the correction area 110. As a result, wrong letters are erased, and correct letters can be immediately written over.

On the other hand, the head main body 60 of the coat film transfer head H is freely rotatable about its axial center, while maintaining the standard tape pressing and transferring position set by the operation lever 70, and therefore not only the linear portion such as a line of characters, but also curves and other figures as shown in Fig. 12 (b), Fig. 14 (b), and Fig. 15 (b) can be corrected neatly along the curvature.

Turning attention to the inside mechanism and operation of the coat film transfer tool 1, by such pressing manipulation of the coat film transfer head H, when the pulling force (arrow X direction in Fig. 4) applied on the coat film transfer tape T acts on the pay-off reel 3 as a rotary torque, the pay-off rotary gear 45 is put into rotation through the tape core 40 of the pay-off reel 3 and also the clutch mechanism 50. This rotating force causes to rotate the take-up rotary gear 46 and the take-up reel 4 integral therewith in the rotating direction in cooperation by means of the tape interlock unit D, thereby automatically winding up the used coat film transfer tape T'.

In this case, the rotation ratio (corresponding to the gear ratio of the tape interlock unit D) of the pay-off rotary gear 45 and take-up rotary gear 46 is always constant, but the ratio of the outer diameter of the coat film transfer tape T on the pay-off reel 3 and the outer diameter of the used coat film transfer tape T' on the take-up reel 4 is always changing and is not constant. That is, as the use is repeated, the outer diameter of the coat film transfer tape T on the pay-off reel 3 gradually decreases, while the outer diameter of the used coat film transfer tape T' on the take-up reel 4 increases to the contrary.

As a result, the take-up speed of the take-up reel 4 becomes gradually faster than the pay-off speed of the pay-off reel 3, and the synchronism of the two speeds is broken, and the rotary torque acting on the pay-off reel 3 gradually increases. Consequently, the rotary torque overcomes the frictional force of the clutch mechanism 50, and the tape core 40 slips and rotates on the pay-off rotary gear 45, and the difference in rotary torque between the two reels 3, 4 is canceled, and the pay-off speed is synchronized with the take-up speed, so that smooth running of the coat film transfer tape T is assured.

As mentioned above, since the power transmission in the clutch mechanism 50 makes use of the frictional force by the thrust load between the tape core 40 and the engaging protrusions 100, 100, ... of the pay-off rotary gear 45, in the configuration

of the clutch mechanism 50, by properly adjusting the dimensional relation of the mutual constituent members 3, 45, 91 in the thrust direction, the frictional force can be set at an optimum value.

Incidentally, if a slack of coat film transfer tape T occurs between the pay-off reel 3 and take-up reel 3 due to handling error by the user or the like, by manipulating the rewind button 101 in the rewind direction from outside of the case 2 (rotation in arrow Y direction in Fig. 4), the slack of the coat film transfer tape T can be eliminated.

In this case, the rotating force in the rewinding direction Y applied to the rewind button 101 is directly transmitted to the tape core 40 through the rotating engaging portions 105, 105, ... serving also as axial engaging portions, and the tape core 40 rotates in the rewind direction Y. On the other hand, by the reverse rotation inhibiting force of the reverse rotation preventive mechanism 95 and the slip action of the clutch mechanism 50, the rotary gears 45, 46 of the tape interlock unit D and the tape core 41 of the take-up reel 4 are in stopped state. As a result, the slack of the coat film transfer tape T between the two reels 2, 3 is eliminated.

By the use of the coat film transfer tool 1, when the coat film transfer tape T wound on the pay-off reel 3 is completely wound up and collected on the take-up reel 4 as used tape T', the entire tape cartridge C is replaced with a new tape cartridge,

and this replacement is done instantly.

That is, as mentioned earlier, in the tape cartridge C, the support main body 15 is composed to support rotatably the opposite side ends 31a, 32a of the rotary shafts 31, 32 of the both reels 3, 4 supported on the rotary support shafts 11, 12 of the case 2, and setting of the coat film transfer tape T on the coat film transfer head H has been already completed in the stage of the product.

Accordingly, the user, gripping the support main body 15, has only to cause the rotary shaft 31 (specifically the rotary shaft 91 of the pay-off rotary gear 45) and rotary shaft 32 (specifically the tape core 41) of the both reels 3, 4 to be engaged with the rotary support shaft 11 and rotary support shaft 12 (specifically the rotary shaft 46a of the take-up rotary gear 46) of the case 2 from the upper side, and put the tape cartridge C into the case 2 while positioning the coat film transfer head H at the leading end specified position of the case 2, that is, in the insertion groove 10a (this positioning is done easily by positioning means positions 37, 38, ...), so that the replacement is over.

In thus constituted coat film transfer tool 1, the support main body 15 of the tape cartridge C includes the support base plate 20 which rotatably supports the opposite-side ends 31a, 32a of the rotary shafts 31, 32 of the pay-off reel 3 and take-up reel 4 detachably and rotatably supported on the rotary support

shafts 11, 12 of the case 2 of the coat film transfer tool 1, and this support base plate 20 has a flat plate skeletal structure having an outer contour corresponding to the inner contour of the case 2, and therefore as compared with the conventional plastic container, the rate of the amount of materials used for the support main body 15 in the entire device is substantially decreased.

Embodiment 2

This embodiment is shown in Fig. 16, in which the structure of the coat film transfer head H is modified.

That is, the coat film transfer head H of the embodiment includes positioning means 120 for positioning and holding the head main body 60 steplessly around the axial center.

This positioning means 120 is specifically composed of the operation lever 70 provided in the supported portion 65 of the head holder 61, and the insertion part 71 provided in the bearing 66.

The insertion part 71 is set in the width dimension enough to be engaged with the operation lever 70 elastically to be held from its both sides, and functions as the positioning engaging portion of the operation lever 70.

In such configuration, the head main body 60 of the coat film transfer head H holds the tape pressing and transferring position freely selected and set by the operation lever 70,

stably with a certain fixing force during use.

The other structure and action are same as in embodiment 1.

Embodiment 3

This embodiment is shown in Fig. 17, in which the structure of the coat film transfer head H is modified.

That is, the coat film transfer head H of the embodiment includes positioning means 121 for positioning and holding the head main body 60 at plural steps around the axial center.

This positioning means 121 is specifically composed of, same as in embodiment 2, the operation lever 70 provided in the supported portion 65, and the insertion part 71 provided in the bearing 66.

This insertion part 71 functioning as the positioning engaging portion is, same as in embodiment 2, set in the width dimension enough to be engaged with the operation lever 70 elastically to be held from its both sides, and further at the specified position in the longitudinal direction, positioning recesses 71a, 71a, ... for positioning and accommodating the operation lever 70 are provided at specific intervals.

In such configuration, the head main body 60 of the coat film transfer head H holds the tape pressing and transferring position selected and set at steps by the operation lever 70, stably with a certain fixing force during use. The other

structure and action are same as in embodiment 1.

Embodiment 4

This embodiment is shown in Fig. 18 and Fig. 19, in which the structure of the coat film transfer head H is modified.

That is, the coat film transfer head H of the embodiment includes, same as in embodiment 3, positioning means 122 for positioning and holding the head main body 60 at plural steps around the axial center.

This positioning means 122 is composed of an engaging bump 122a provided on the cylindrical outer circumference of the supported portion 65, and engaging recesses 122b, 122b, ... provided corresponding to the engaging bump 122a at specific intervals in the circumferential direction on the cylindrical inner circumference of the bearing 66, and the engaging bump 122a and any one of the engaging recesses 122b, 122b, ... are elastically positioned and engaged with each other.

In such configuration, the head main body 60 of the coat film transfer head H, same as in embodiment 3, holds the tape pressing and transferring position selected and set at steps by the operation lever 70, stably with a certain fixing force during use.

Incidentally, the structural relation of the engaging bump 122a and the engaging recesses 122b, 122b, ... may be reverse to the illustrated case.

The other structure and action are same as in embodiment 1.

Embodiment 5

This embodiment is shown in Fig. 20, in which the shape of the operation lever 70 is slightly modified from the case of embodiment 1.

That is, in embodiment 1, the operation knob 70a of the operation lever 70 is a flat disk, but it is a spherical form in this embodiment. The other structure and action are same as in embodiment 1.

Embodiment 6.

This embodiment is shown in Fig. 21, in which the structure of the coat film transfer head H is slightly modified.

That is, the opening position of the setting opening 65a in the supported portion 65 is set at a position rotated by 180° from the case of embodiment 1.

In such configuration, in the rotation range defined by the operation lever 70 and operation guide 72 (range from Fig. 21 (a) to (b)), the supported portion 65 and the bearing 66 are supported slidably and rotatably always with a cylindrical surface contacting relation.

The other structure and action are same as in embodiment 1.

Embodiment 7

This embodiment is shown in Fig. 22 and Fig. 23, in which the mounting position of the coat film transfer head H is modified.

That is, in this embodiment, the coat film transfer head H is attached to the leading end portion of the case 2. The structure of the coat film transfer head H is identical with that in embodiment 1, except for the mounting position.

The other structure and action are same as in embodiment 1.

The foregoing embodiments 1 to 7 are preferred embodiments of the invention, and the invention is not limited to them alone, but may be changed and modified in various forms within the specified range. For example, the following changes are possible.

(1) The constituent parts of the tape cartridge C, for example, the support main body 15, particularly, its support base plate 20, and the structure of the coat film transfer head H are not limited to the illustrated embodiments alone as far as the specified purpose is achieved.

(2) In the illustrated embodiments, the clutch mechanism 50 is disposed at the pay-off reel 3 side, but it may be also disposed at the take-up reel side 4 depending on the purpose, or may be disposed at both reels 3, 4. Thus, when the clutch

mechanism is provided at the both reels 3, 4, in the rewinding operation by the tape rewind mechanism, application of excessive tension on the coat film transfer tape T can be effectively prevented.

(3) Instead of the correction paint layer of the coat film transfer tape T in the illustrated coat film transfer tool, by using a paint layer presenting a clear fluorescent color, the position coated with this paint layer is emphasized visually, so that it can be used as a so-called marker coat film transfer tool.

(4) As the coat film transfer tape T, by using film base material of which one side is coated with an adhesive through a peeling layer, the coat film transfer tool may be used as a gluing tool for transferring only the adhesive layer on the paper.

(5) All illustrated embodiments relate to the refill type coat film transfer tool capable of replacing the coat film transfer tape, but the invention may be also applied to the disposable type coat film transfer type not allowing to replace the coat film transfer tape.

As described in detail herein, according to the invention, the coat film transfer head device comprises a head main body for pressing and transferring a coat film transfer tape, a head holder for supporting the head main body rotatably about its axial center, and a rotation operation unit for positioning

the head main body in the rotating direction, this rotating operation unit functions also as the head position indicating unit for indicating the tape pressing and transferring position of the head main body, so that the following excellent effects are brought about.

That is, the head main body, by manipulating the rotating operation unit, can properly select and set its position in the rotating direction within a specified range, and an optimum tape pressing and transferring position can be taken depending on the application or user's manner of holding. It also includes a concept that the coat film transfer tool of the invention, if originally designed for use by a right-handed user in the head basic structure, can be held and used by a left-handed user naturally in an optimum head position.

The rotating operation unit also functions as a head position indicating unit for indicating the tape pressing and transferring position of the head main body, so that the user can check the tape pressing and transferring position directly and visually.

As the invention may be embodied in several forms without departing from the spirit of essential characteristics thereof, the present embodiments are therefore illustrative and not restrictive, since the scope of the invention is defined by the appended claims rather than by the description preceding them, and all changes that fall within metes and bounds of the claims,

or equivalence of such metes and bounds thereof are therefore intended to be embraced by the claims.

WHAT IS CLAIMED IS:

1. A coat film transfer head device disposed at the leading end portion of a coat film transfer tool for pressing a coat film transfer tape onto the object of transfer, comprising:

a head main body for pressing and transferring the coat film transfer tape,

a head holder for supporting the head main body rotatably about its axial center, and

a rotating operation unit for positioning said head main body in the rotating direction,

wherein the rotating operation unit serves also as a head position indicating unit for indicating the tape pressing and transferring position of the head main body.

2. The coat film transfer head device of claim 1,

wherein the rotating operation unit includes an operation lever related to the tape pressing and transferring position of said head main body, and

this operation lever projects to the outside of the case through an operation guide in a slit form penetrating through the case of the coat film transfer tool.

3. The coat film transfer head device of claim 2,

wherein said operation guide in a slit form defines the operating range in the rotating direction of the operation lever, and controls the tape pressing and transferring position of the head main body.

4. The coat film transfer head device of any one of claims 1 to 3,

wherein said head holder includes a cylindrical supported portion provided concentrically and integrally with the head main body, and a cylindrical bearing provided at the device main body side for supporting the supported portion slidably and rotatably.

5. The coat film transfer head device of claim 4,

wherein said supported portion is formed in an arc section having a setting opening for coat film transfer tape to the head main body in part.

6. The coat film transfer head device of claim 1, further comprising:

positioning means for positioning and holding the head main body steplessly around its axial center.

7. The coat film transfer head device of claim 4, further comprising:

positioning means for positioning and holding the head main body steplessly around its axial center,

wherein this positioning means comprises the operation lever provided in the supported portion, and a positioning engaging portion in a slit form provided in the cylindrical bearing oppositely to the operation guide in a slit form, to be engaged with the operation lever elastically as being held at both sides.

8. The coat film transfer head device of claim 1, further comprising:

positioning means for positioning and holding the head main body at plural steps around its axial center.

9. The coat film transfer head device of claim 4, further comprising:

positioning means for positioning and holding the head main body at plural steps around its axial center,

wherein this positioning means comprises the operation lever provided in the supported portion, and a positioning engaging portion in a slit form provided in the cylindrical bearing oppositely to the operation guide in a slit form, and

this positioning engaging portion has a width enough to be engaged with the operation lever elastically as being held at both sides, and also includes a positioning recess for positioning the operation lever at the specified position in its longitudinal direction.

10. The coat film transfer head device of claim 4, further comprising:

positioning means for positioning and holding the head main body at plural steps around its axial center,

wherein this positioning means comprises an engaging bump provided on the cylindrical outer circumference of the supported portion or the cylindrical inner circumference of the cylindrical bearing, and engaging recesses provided at specific

intervals in the circumferential direction on the cylindrical inner circumference of the cylindrical bearing or the cylindrical outer circumference of the supported portion, and the engaging bump and engaging recess are elastically positioned and engaged.

11. A refill type coat film transfer tool capable of replacing the coat film transfer tape,

wherein a tape cartridge containing a rotatable pay-off reel on which a coat film transfer tape is wound, and a rotatable take-up reel for collecting the used coat film transfer tape is detachably provided in a case which is held by one hand,

coat film transfer head means for pressing the coat film transfer tape onto the object of transfer is attached to the leading end portion of said tape cartridge,

this coat film transfer head means comprises a head main body for pressing and transferring the coat film transfer tape, a head holder for supporting this head main body rotatably about its axial center, and a rotating operation unit for positioning the head main body in the rotating direction, and

this rotating operation unit functions also as the head position indicating unit for indicating the tape pressing and transferring position of the head main body.

12. A disposable coat film transfer tool using a one-time coat film transfer tape,

wherein a pay-off reel on which a coat film transfer tape

is wound, and a take-up reel for collecting the used coat film transfer tape are provided in a case which is held by one hand,

coat film transfer head means for pressing the coat film transfer tape onto the object of transfer is attached to the leading end portion of said case,

this coat film transfer head means comprises a head main body for pressing and transferring the coat film transfer tape, a head holder for supporting this head main body rotatably about its axial center, and a rotating operation unit for positioning the head main body in the rotating direction, and

this rotating operation unit functions also as the head position indicating unit for indicating the tape pressing and transferring position of the head main body.

ABSTRACT OF THE DISCLOSURE

A coat film transfer head device having a coat film transfer head held at a tape pressing and transferring position suited to the user's manner of holding a writing tool, and capable of checking the tape pressing and transferring position directly and visually. It comprises a head main body for pressing and transferring a coat film transfer tape, a head holder for supporting the head main body rotatably about its axial center, and a rotating operation unit for positioning the head main body in the rotating direction, and this rotating operation unit functions also as the head position indicating unit for indicating the tape pressing and transferring position of the head main body. Therefore, the user can check the tape pressing and transferring position directly and visually.

FIG. 1

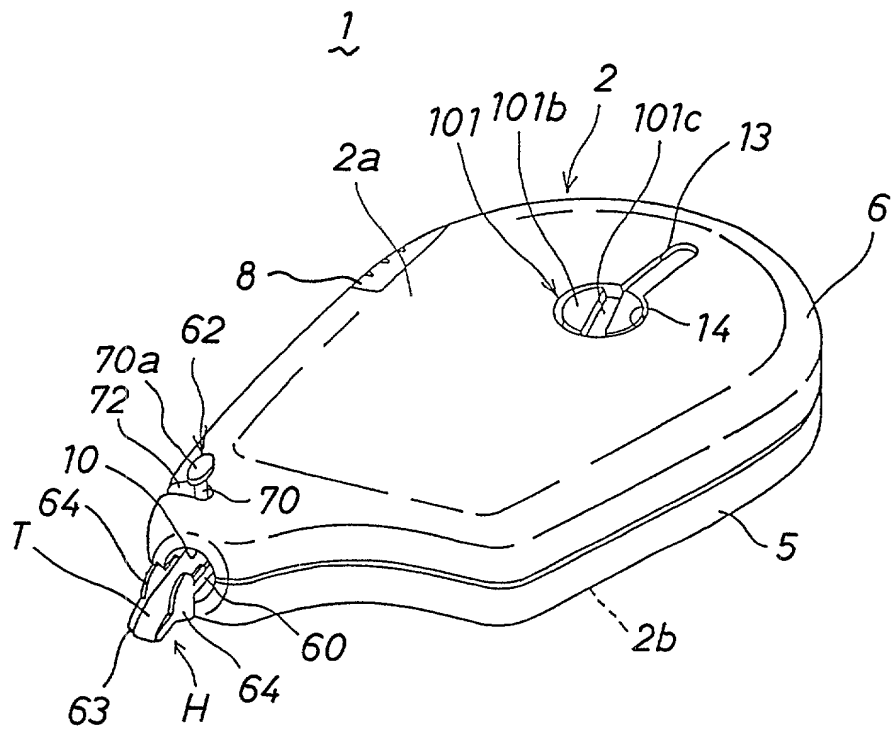


FIG. 2

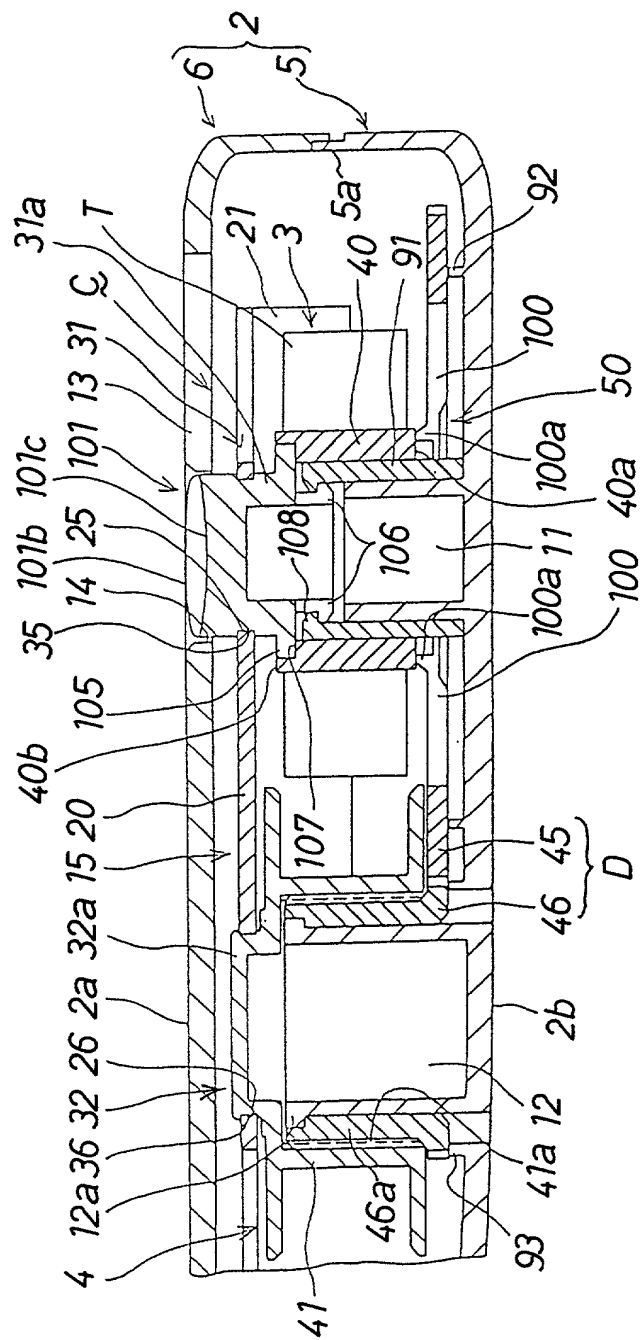


FIG. 3




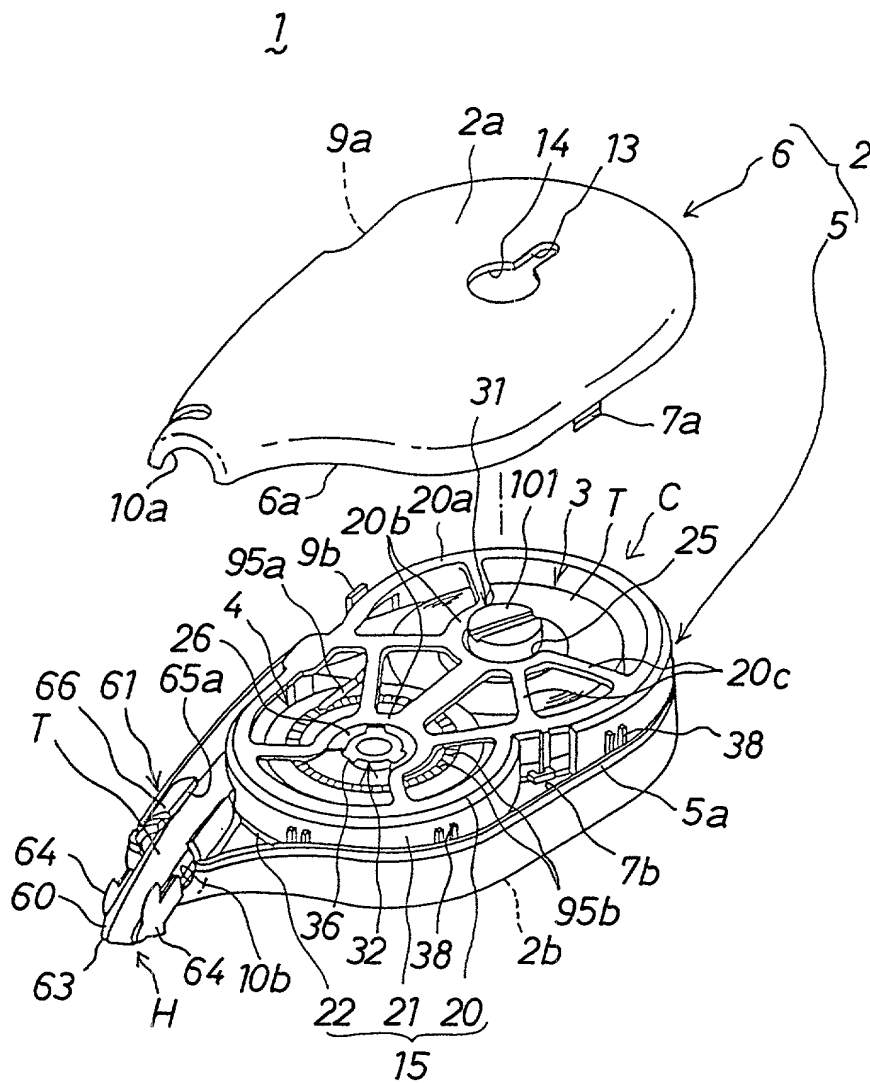


FIG. 4

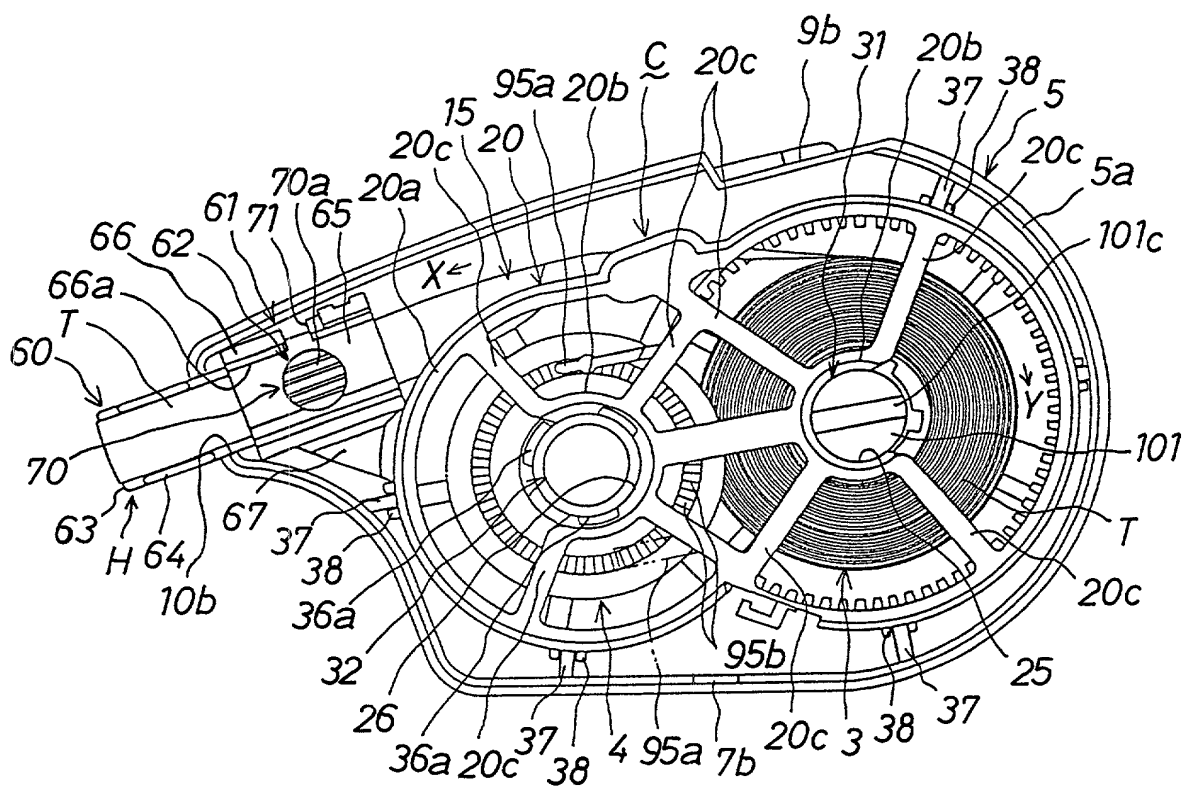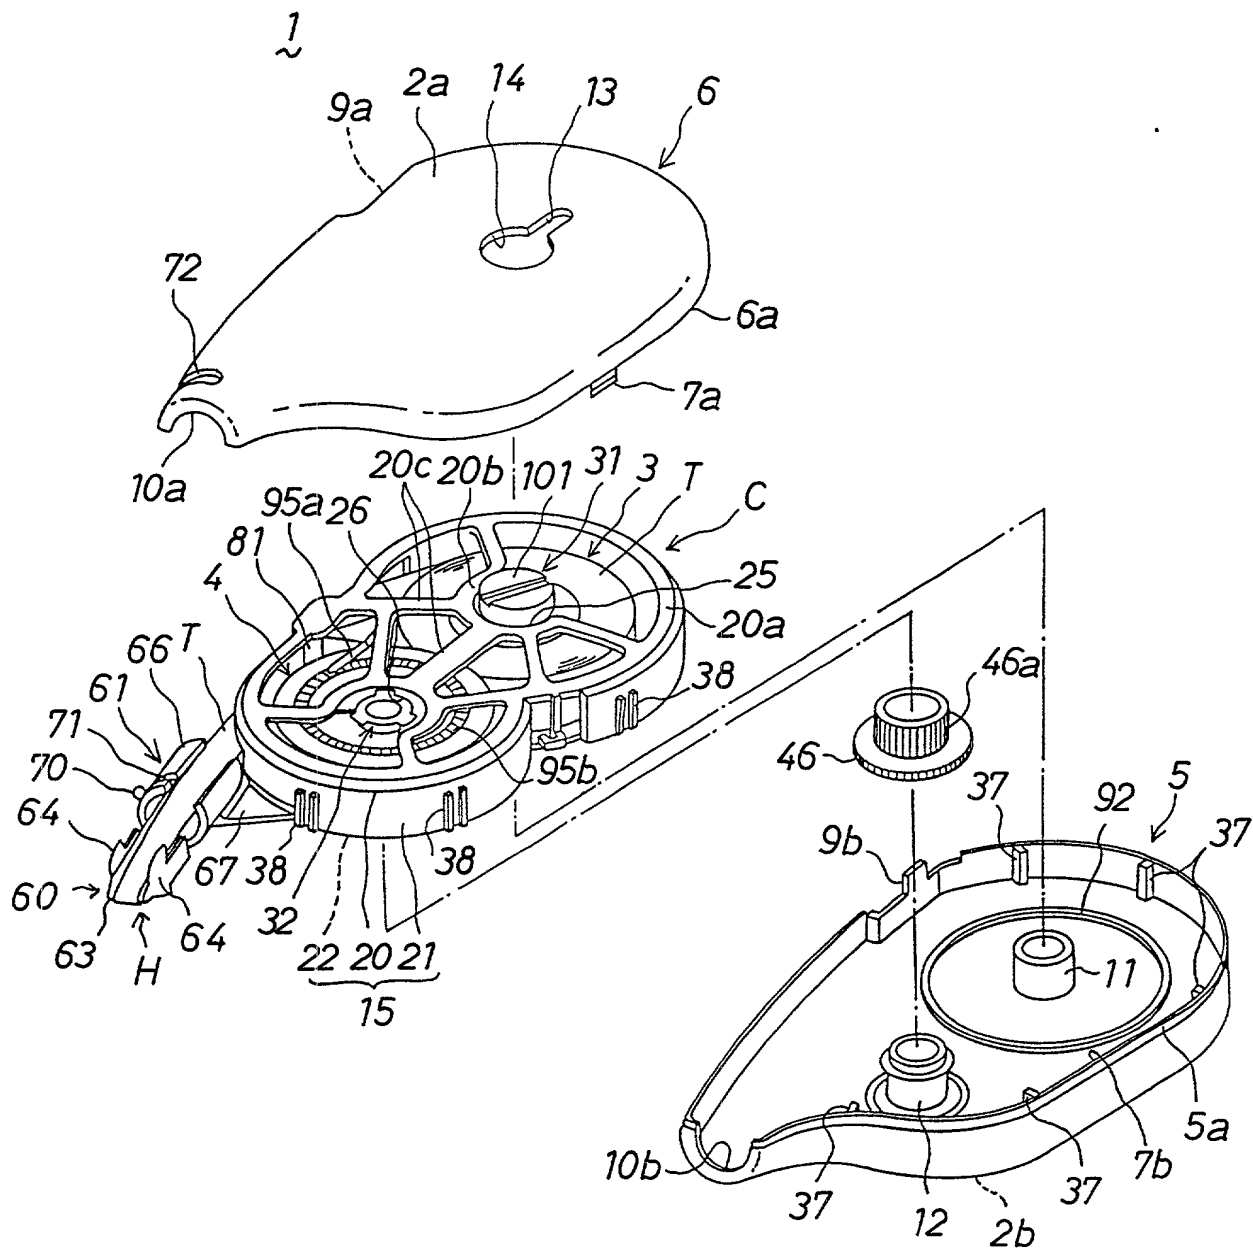

Material	Modulus	Poisson's ratio	Thermal expansion coefficient	Thermal conductivity	Specific heat	Density
Aluminum	70 GPa	0.33	23.6 $\times 10^{-6}$ /K	167 W/mK	900 J/kgK	2700 kg/m ³
Steel	200 GPa	0.30	12.0 $\times 10^{-6}$ /K	50 W/mK	460 J/kgK	7850 kg/m ³
Carbon fiber	230 GPa	0.28	1.5 $\times 10^{-6}$ /K	12 W/mK	700 J/kgK	1600 kg/m ³
Kevlar	130 GPa	0.35	4.0 $\times 10^{-6}$ /K	0.17 W/mK	1300 J/kgK	1450 kg/m ³
Fiberglass	70 GPa	0.22	5.0 $\times 10^{-6}$ /K	0.04 W/mK	800 J/kgK	2500 kg/m ³
Concrete	30 GPa	0.18	10.0 $\times 10^{-6}$ /K	1.4 W/mK	880 J/kgK	2400 kg/m ³
Brick	15 GPa	0.20	15.0 $\times 10^{-6}$ /K	0.7 W/mK	840 J/kgK	1800 kg/m ³
Wood	10 GPa	0.30	3.0 $\times 10^{-6}$ /K	0.1 W/mK	1700 J/kgK	700 kg/m ³
Polymers	1-3 GPa	0.40	100.0 $\times 10^{-6}$ /K	0.2 W/mK	1500 J/kgK	1200 kg/m ³

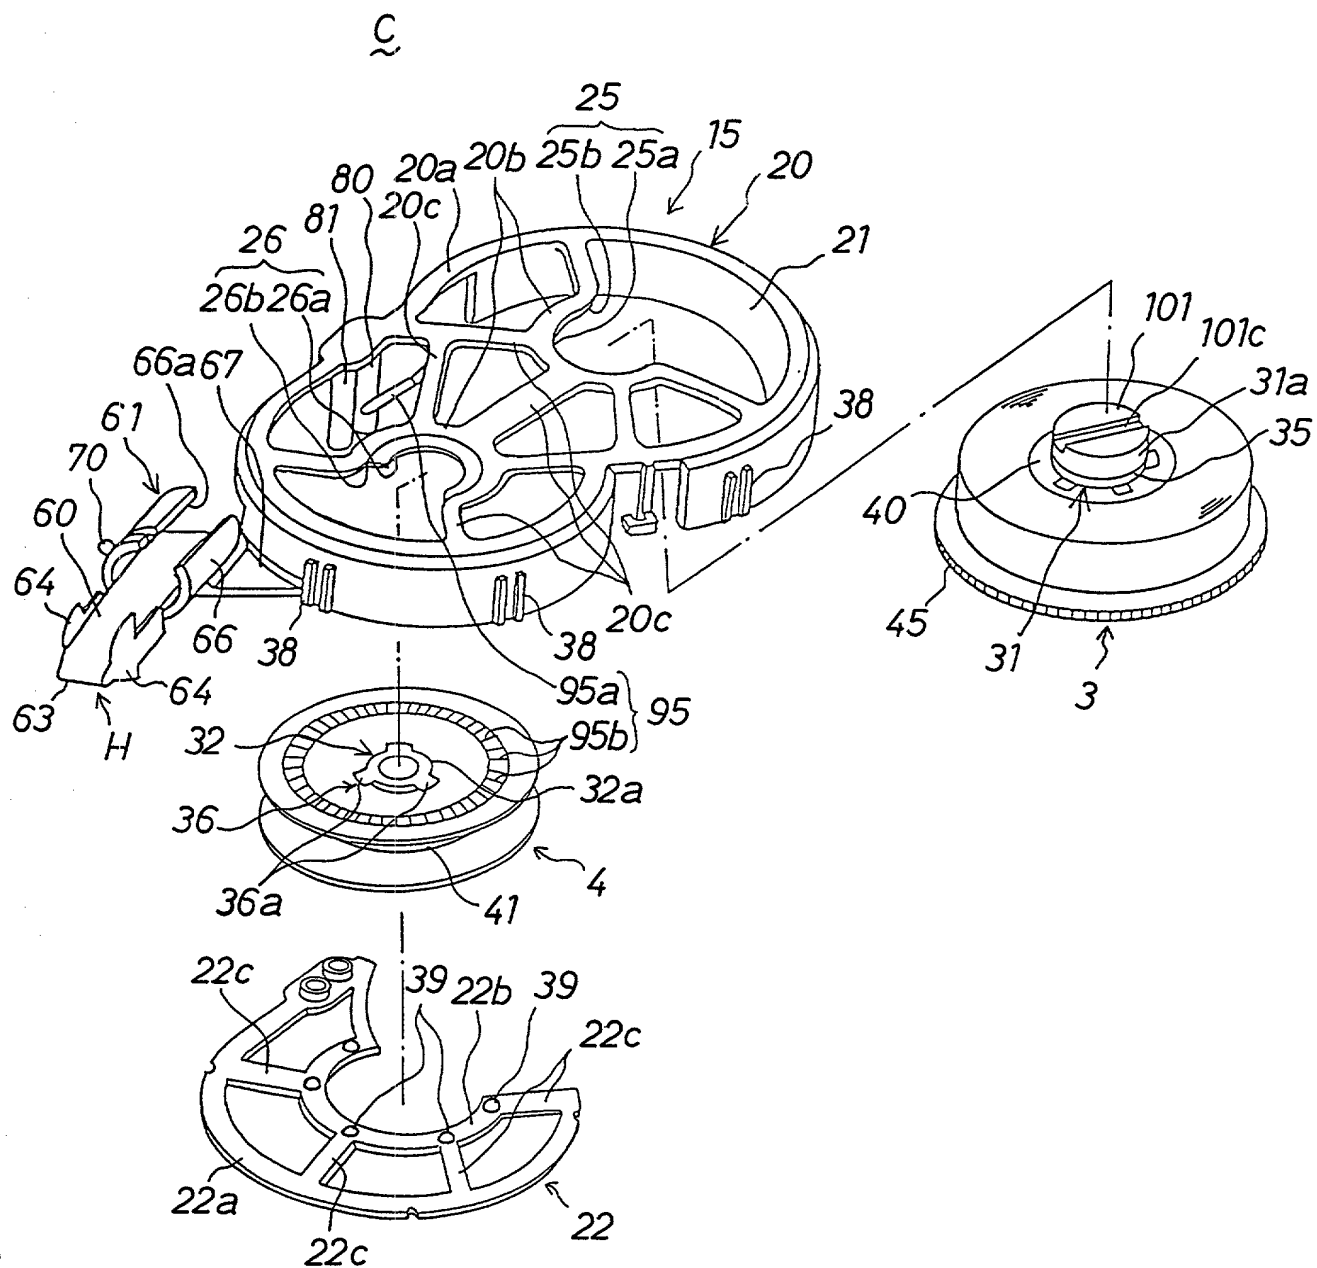

[illegible]

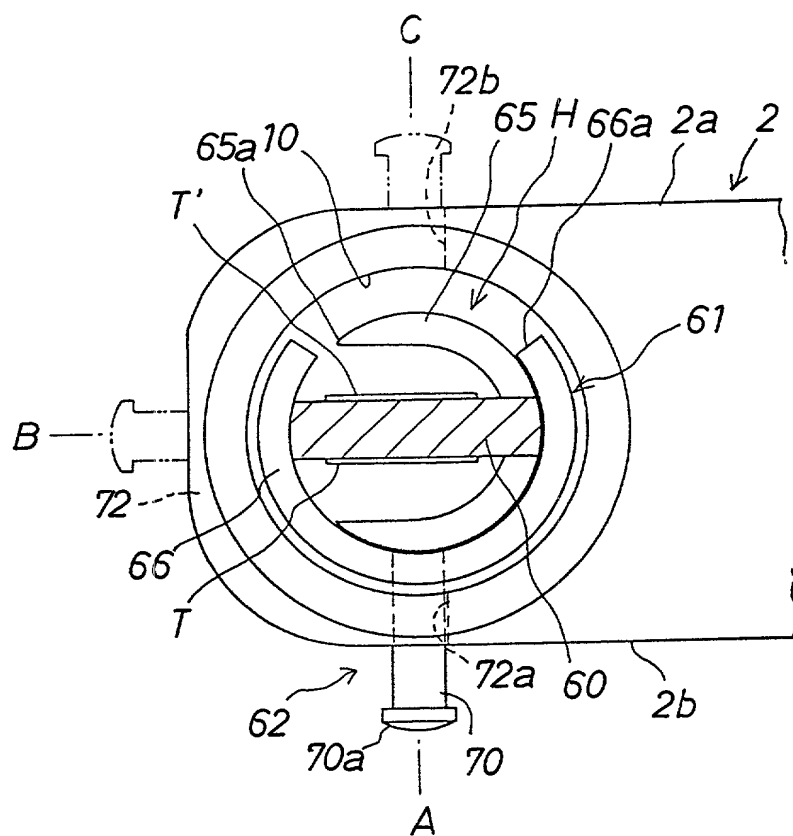
[illegible]

FIG. 8 (a)

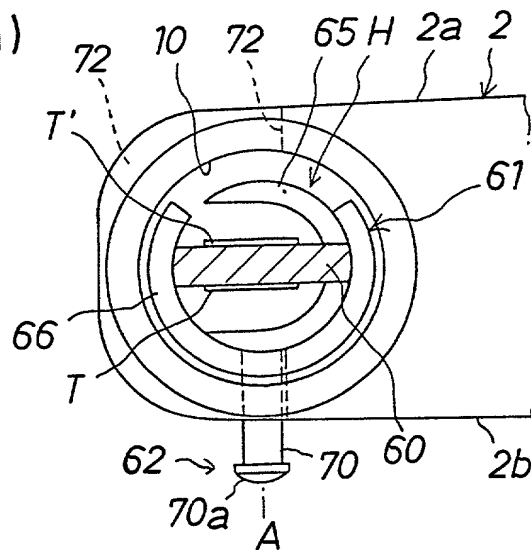


FIG. 8 (b)

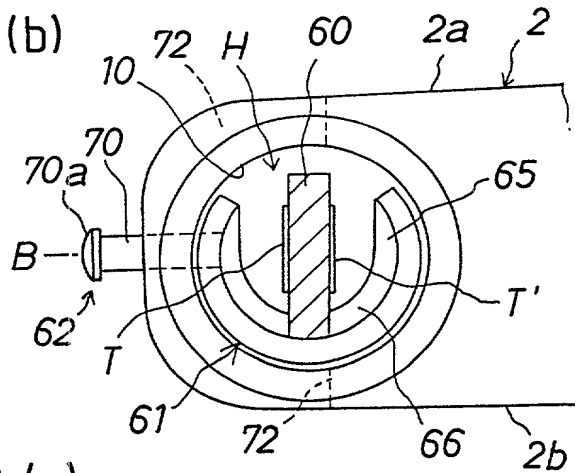


FIG. 8 (c)


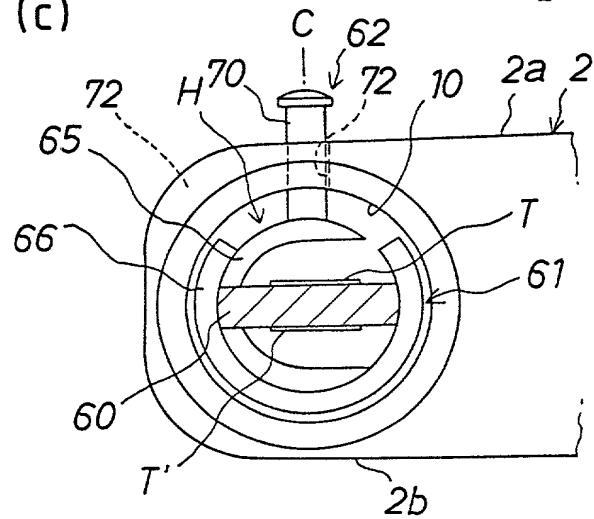


FIG. 9

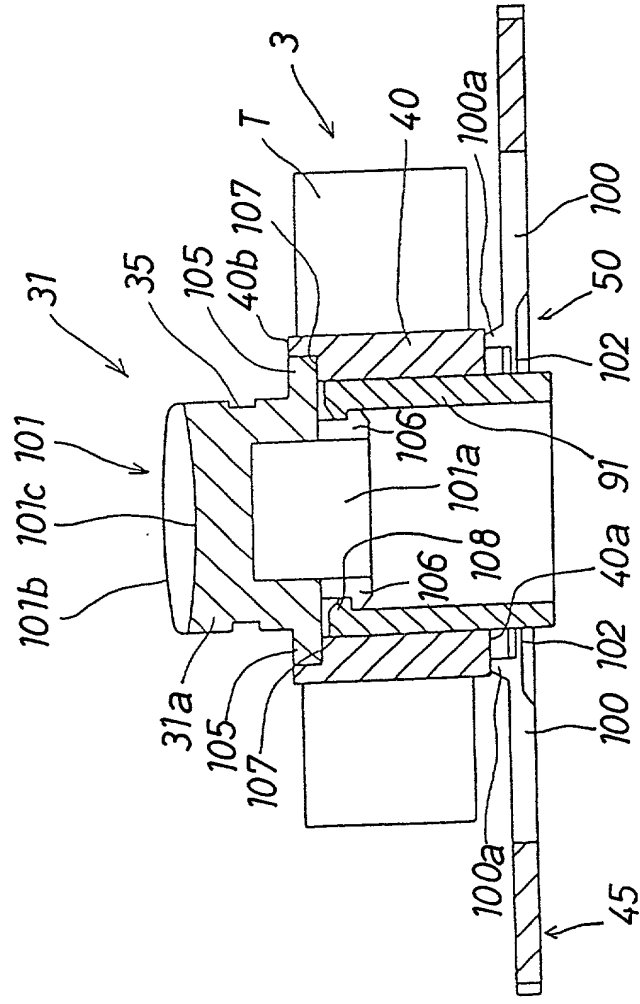

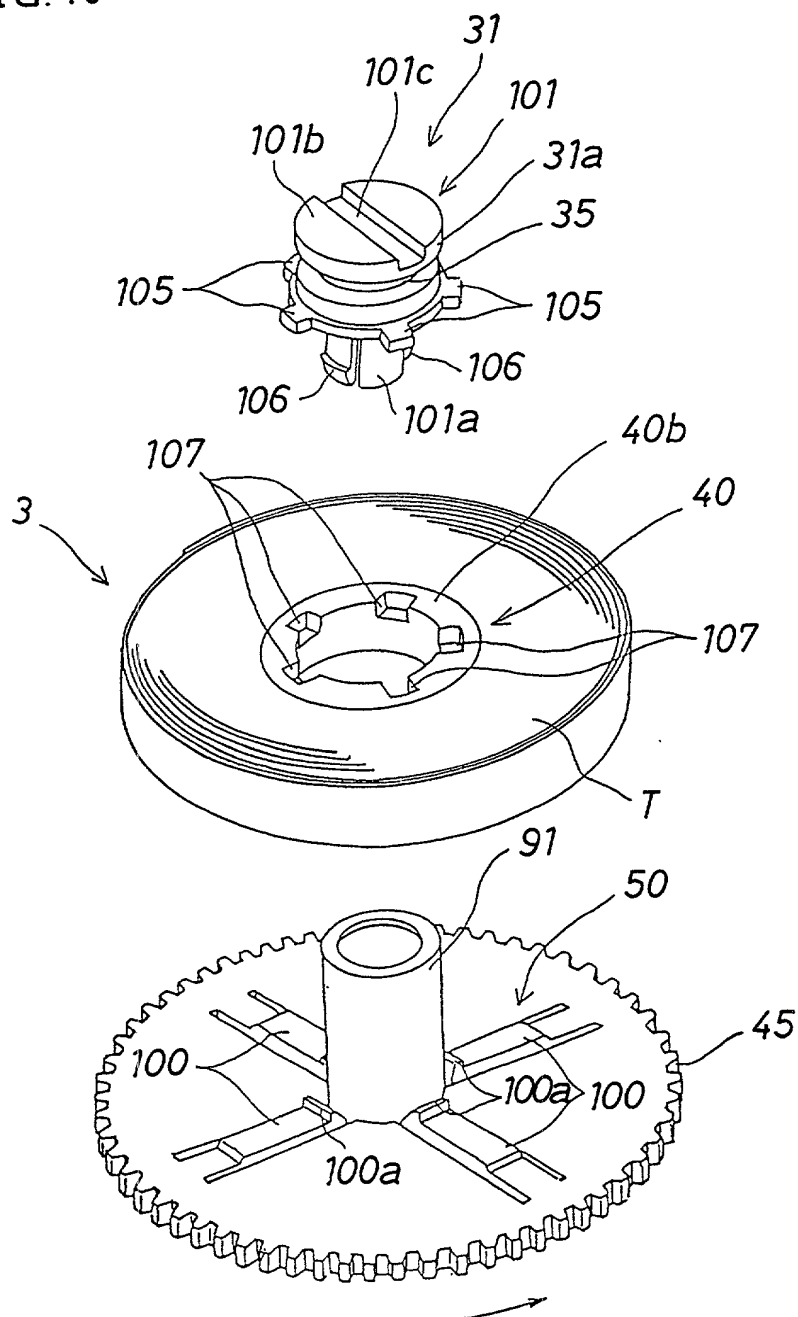
[illegible]

FIG.11(a)

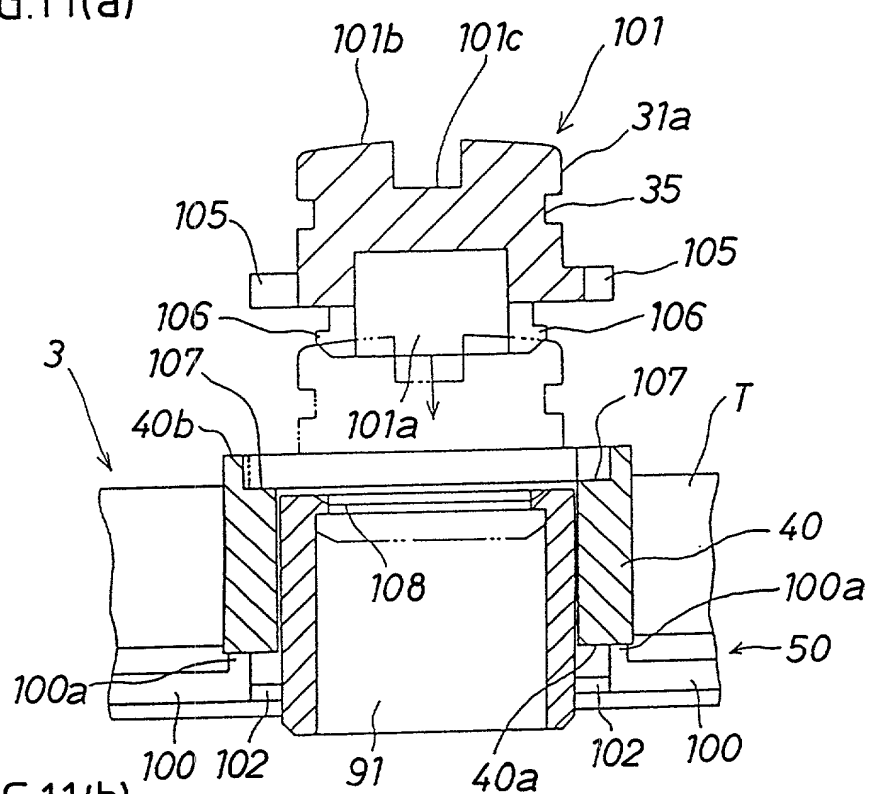


FIG.11(b)

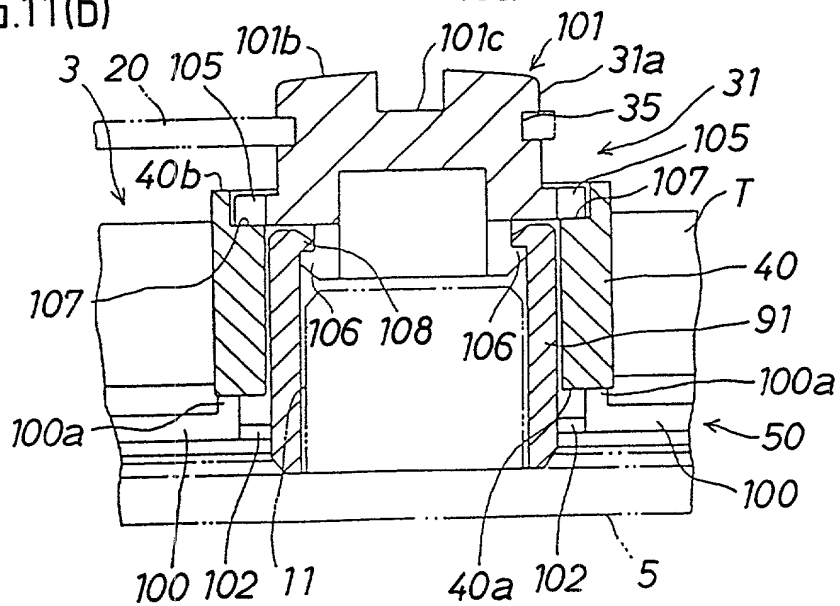


FIG.12 (a)

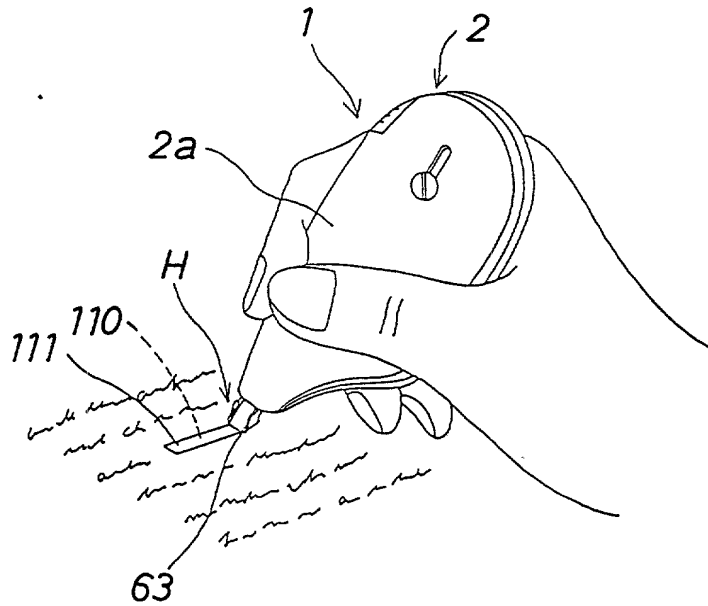


FIG.12 (b)

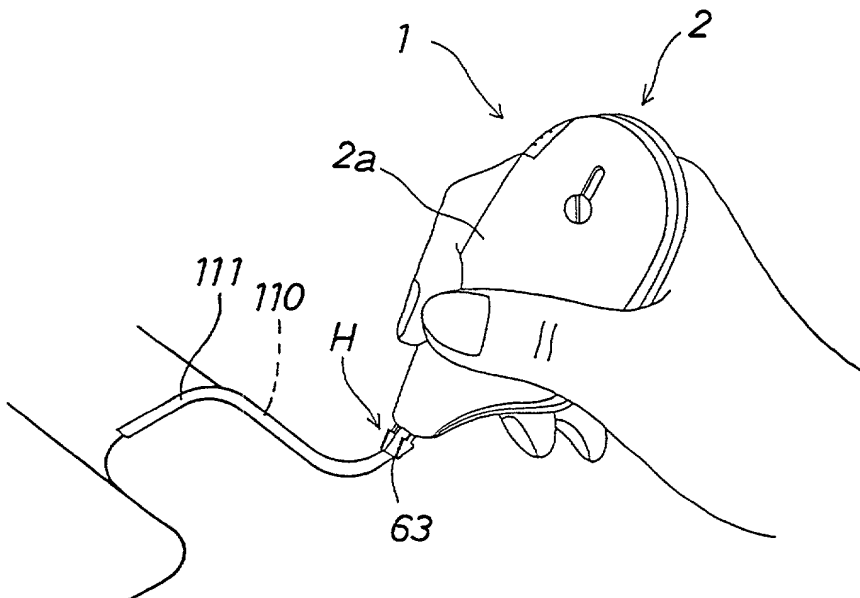


FIG.13

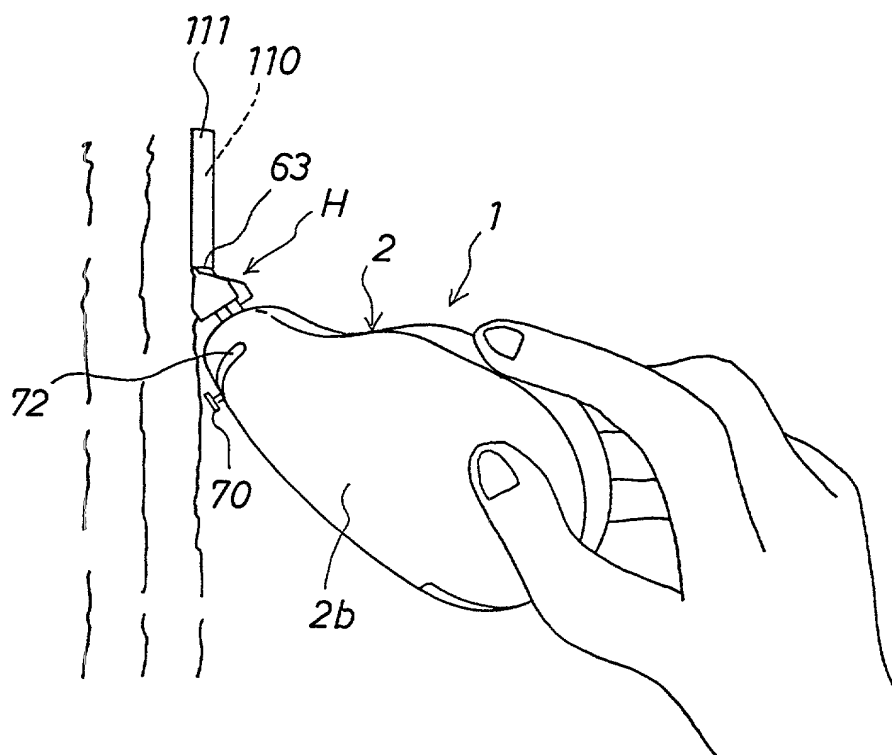


FIG.14(a)

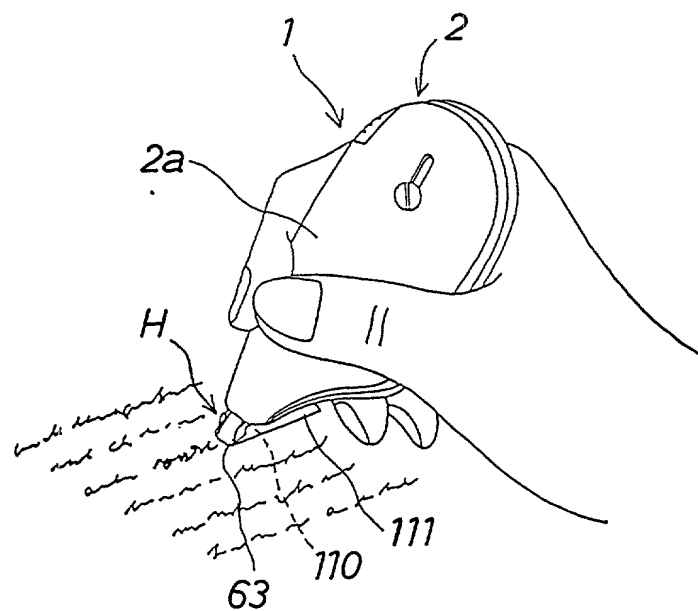


FIG.14(b)

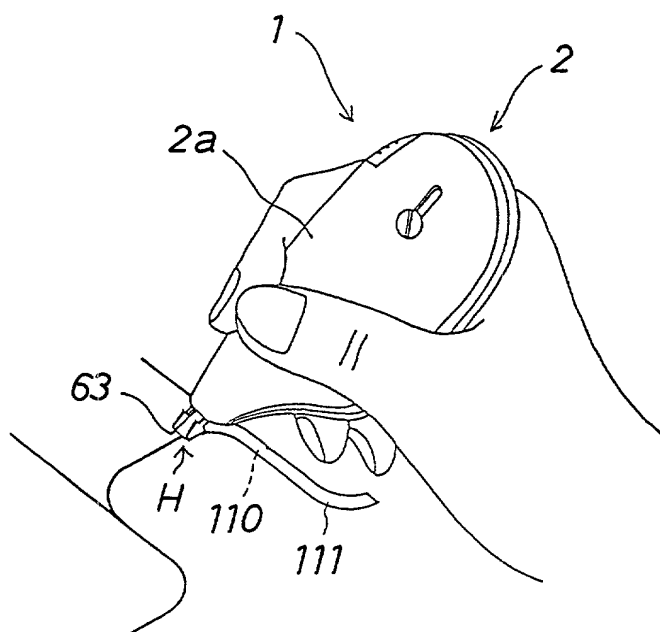


FIG.15(a)

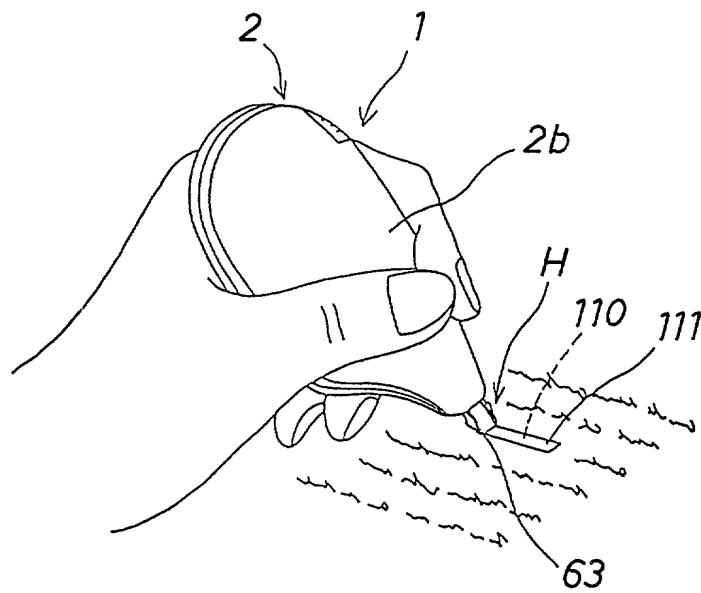


FIG.15(b)

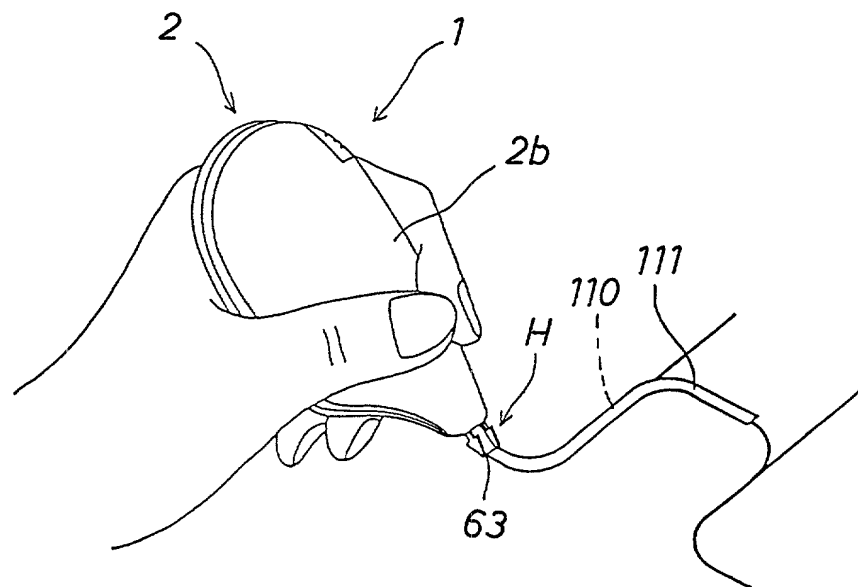


FIG.16(a)

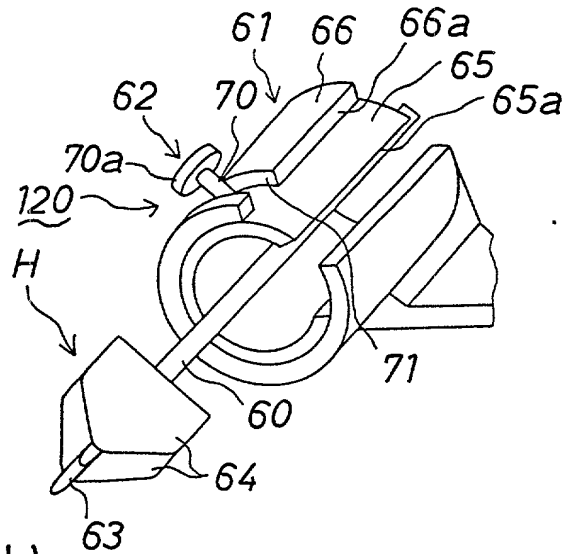


FIG.16(b)




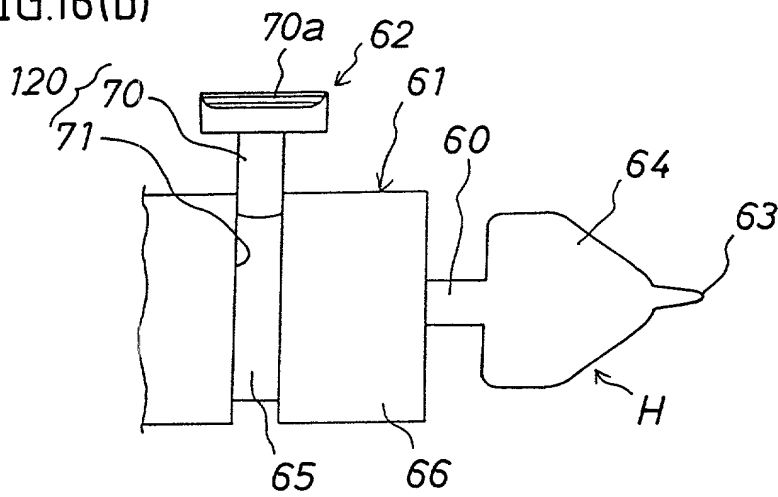


FIG.16(c)

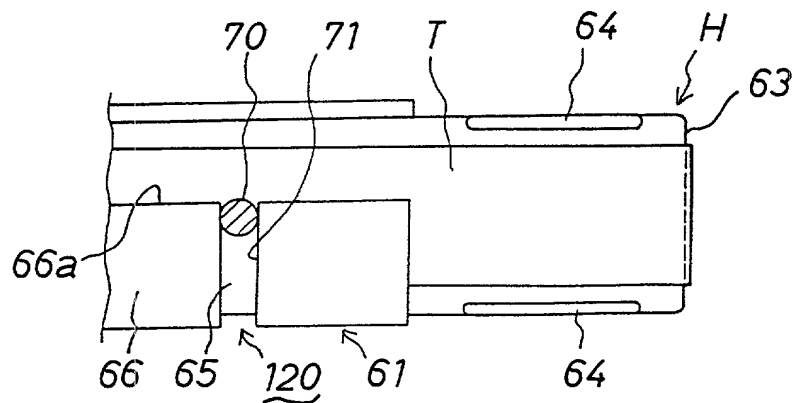

1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2

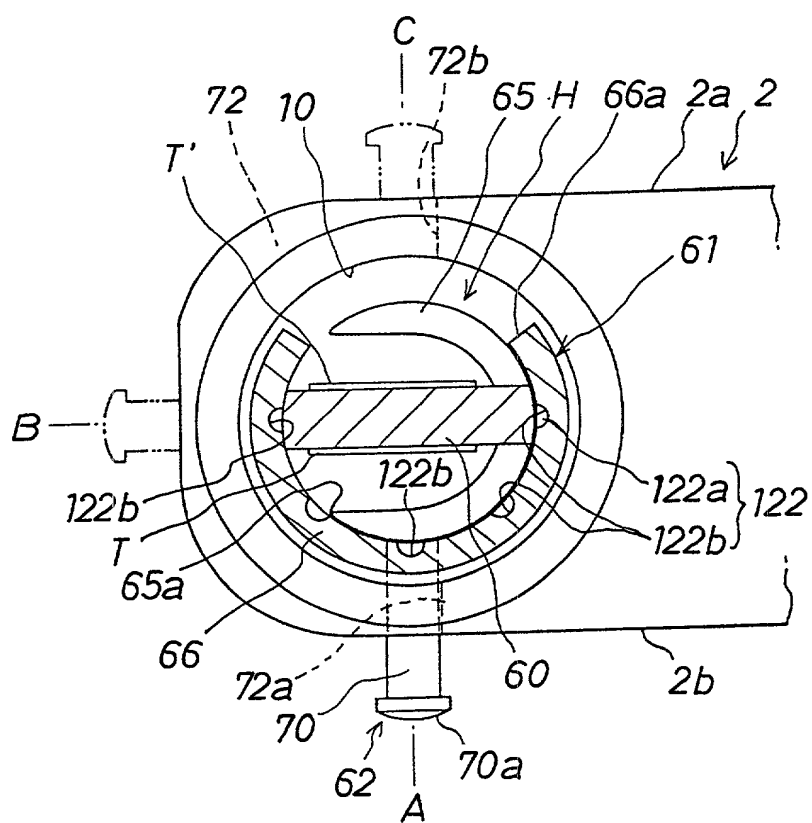

[illegible]

[illegible]

FIG. 20

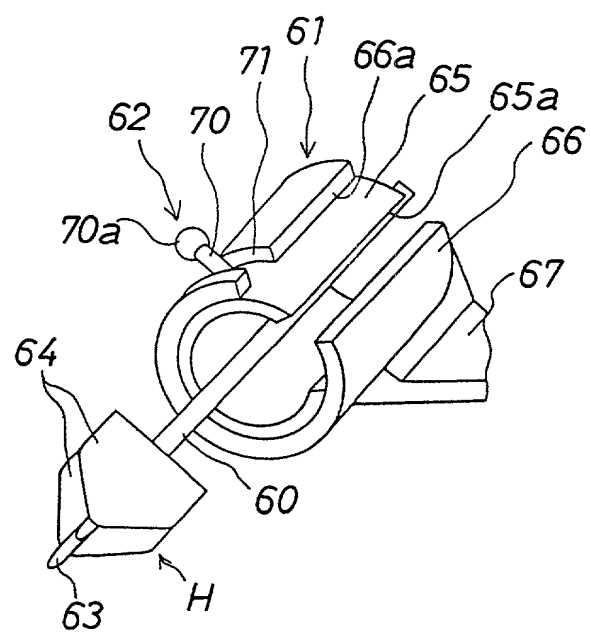


FIG. 21 (a)


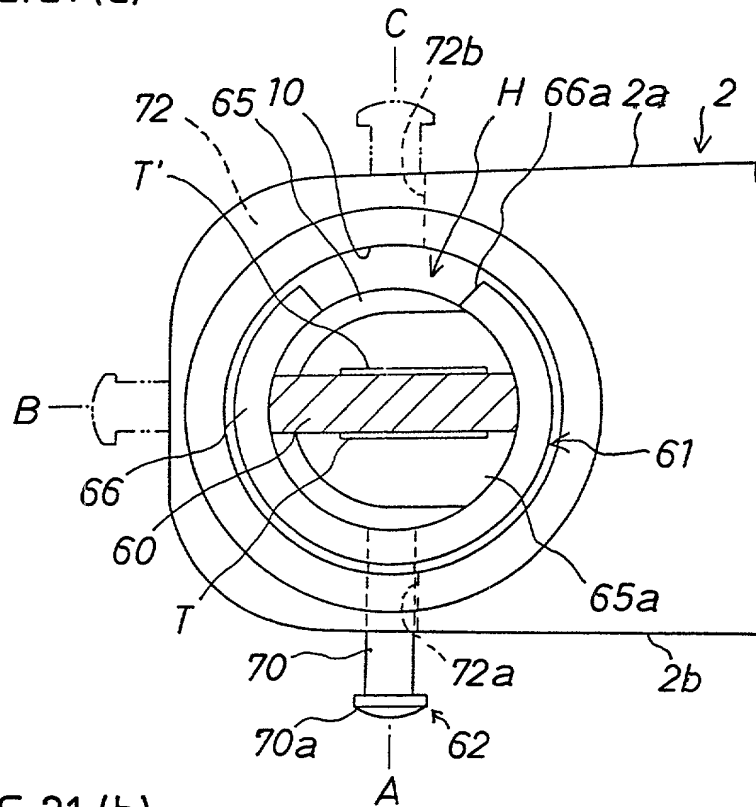


FIG. 21 (b)

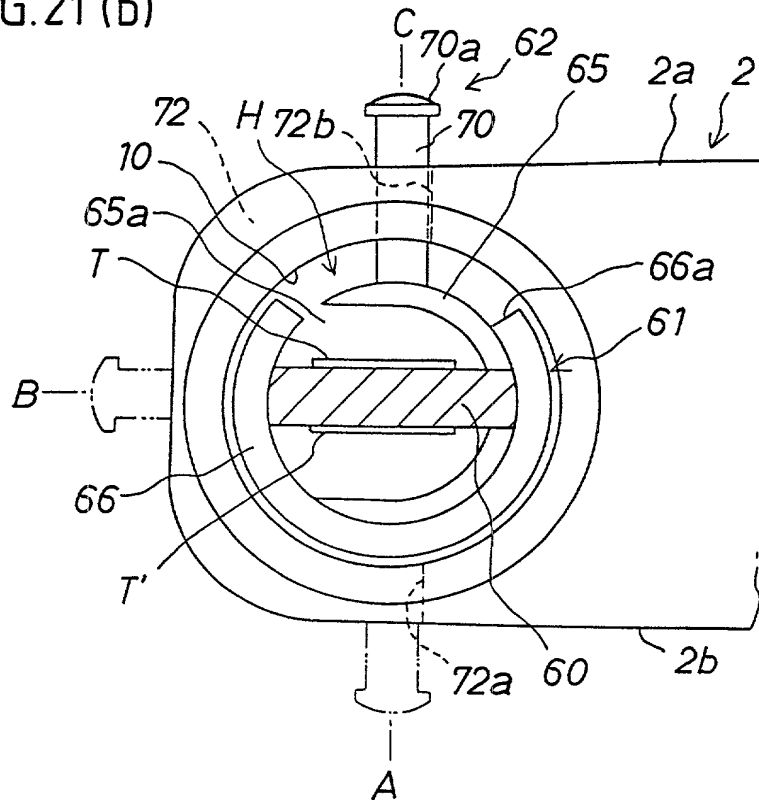

1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------



FIG. 23

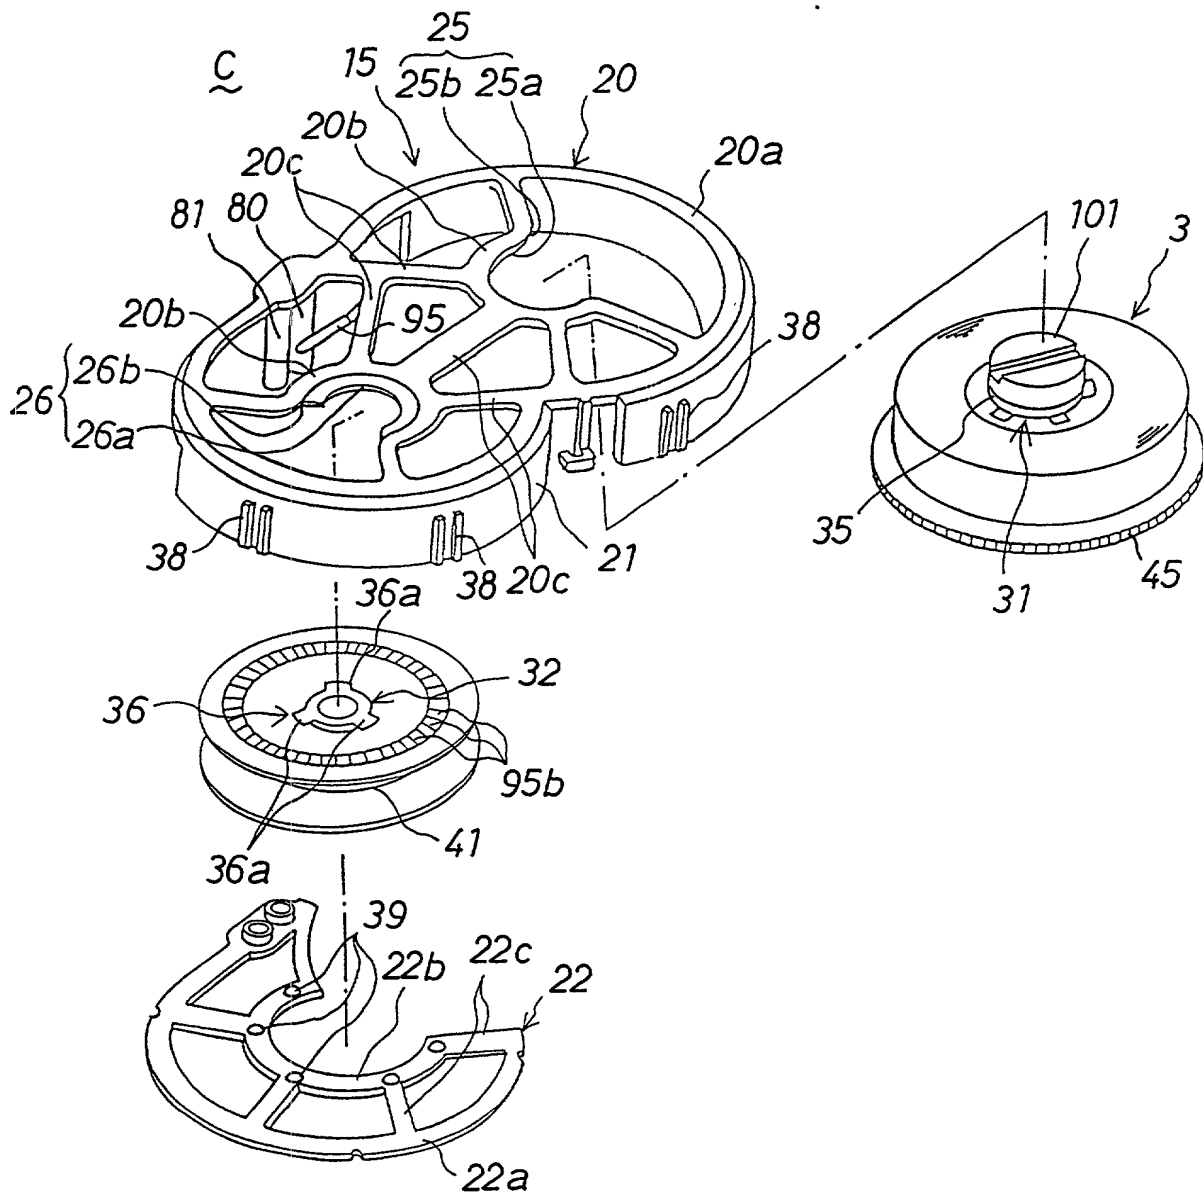


FIG.24 (a)


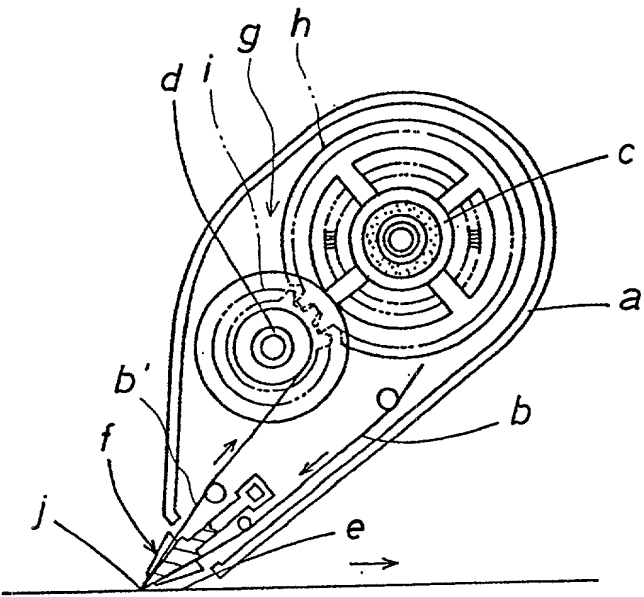


FIG.24 (b)

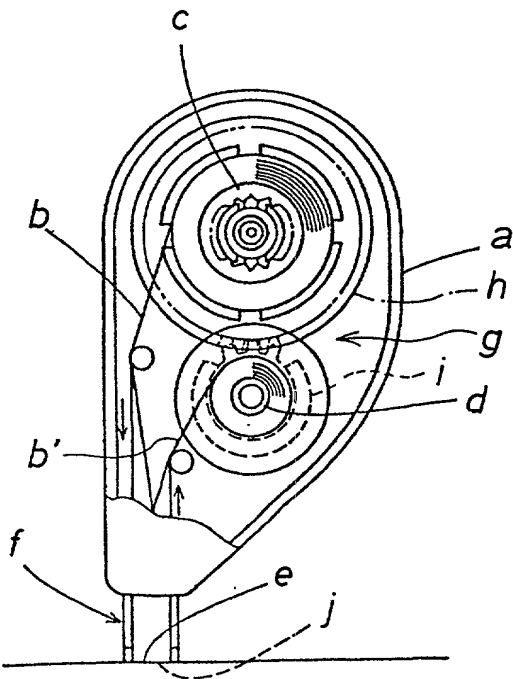

Declaration For U.S. Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
(Insert Title) COAT FILM TRANSFER HEAD DEVICE AND COAT FILM TRANSFER TOOL

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as PCT International Application
Number _____ and was amended on _____
and/or was filed on _____ as United States Application
Number _____ and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International Application having a filing date before that of the application(s) for which priority is claimed:

(List prior foreign applications. See note A on back of this page)	<u>11-192409</u>	<u>Japan</u>	<u>6/7/1999</u>	Priority Claimed <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	
	<u> </u>	<u> </u>	<u> </u>	
	(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

(See Note B on back
of this page)

☐ See attached list for additional prior foreign or provisional applications.

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or §365(c) of any PCT International application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) (U.S. or PCT) in the manner provided by the first paragraph of 35, U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(List prior U.S. Applications or PCT International applications designating the U.S.)	(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

And I hereby appoint as principal attorneys: David T. Nikaido, Reg. No. 22,663; Charles M. Marmelstein, Reg. No. 25,895; George E. Oram, Jr., Reg. No. 27,931; Robert B. Murray, Reg. No. 22,980; E. Marcie Emas, Reg. No. 32,131; Douglas H. Goldhush, Reg. No. 33,125; Monica Chin Kitts, Reg. No. 36,105; Richard J. Berman, Reg. No. 39,107; King L. Wong, Reg. No. 37,500; James A. Poulos, III, Reg. No. 31,714; Patrick D. Muir, Reg. No. 37,403; Sharon N. Klesner, Reg. No. 36,335; Murat Ozu, Reg. No. 44,275; Bradley D. Goldizen, Reg. No. 43,637, and N. Alexander Nolte, Reg. No. 45,689.

Please direct all communications to the following address: ARENT FOX KINTNER PLOTKIN & KAHN, PLLC
1050 Connecticut Avenue, N.W., Suite 600
Washington, D.C. 20036-5339
Telephone No. (202) 857-6000; Facsimile No. (202) 638-4810

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(See Note C
on back of
this page)

Full name of sole or first inventor Shigeru Tamai
 Inventor's signature Shigeru Tamai 14/6/2000
 Residence 2-1-33, Asahigaoka, Ikeda-shi, Osaka, Japan Date
 Citizenship Japan
 Post Office Address same as residence

Full name of second joint inventor, if any Kouhei Koyama
Inventor's signature Kouhei Koyama 14/6/2000
Residence 6-303, Kudocho, Matsugasaki, Sakyo-ku, Kyoto-shi, Kyoto, Japan Date
Citizenship Japan
Post Office Address same as residence

Full name of third joint inventor, if any Masatoshi Shintani
Inventor's signature Masatoshi Shintani 14/6/2000
Residence 8-1-8, Mukogaoka, Sanda-shi, Hyogo, Japan Date
Citizenship Japan
Post Office Address same as residence

Full name of fourth joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

Full name of fifth joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

Full name of sixth joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

Full name of seventh joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

Full name of eighth joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

Full name of ninth joint inventor, if any _____
Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____